

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
 Project \_\_\_\_\_ Position \_\_\_\_\_

## Roll-in

**Model:** J160/2M

**Cod:** J11160200201

Roll-in refrigerated cabinet for GN2/1 trolleys, 2 doors. Plug-in refrigeration unit, 5 heavy duty climatic class and R290 ecological refrigerant gas. Led lighting, snap handle with lock and key as standard. Temperature range -2°+8°C with ventilated refrigeration hot gas defrost. 75 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free); easily replaceable triple chamber magnetic gasket. One-piece structure, interior/exterior AISI 304 stainless steel, exterior galvanised steel back. Rounded inner corners for easy cleaning. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Predisposed for connection to Cosmo remote supervision system and ModBus/RTU Rs485 connection.



## Technical data

<b>Gross capacity:</b>	1679 lt
<b>Temperature range:</b>	-2°+8°C
<b>Refrigerant unit:</b>	Plug-in
<b>Climate class:</b>	5
<b>Cooling gas:</b>	R290
<b>Defrost:</b>	Hot gas
<b>Valve:</b>	Supplied standard with solenoid
<b>Dimensions:</b>	1620×815×2115 mm
<b>Packing dimensions:</b>	1650×920×2260 mm
<b>Gross weight:</b>	231 Kg
<b>Voltage:</b>	220-240 V - 50 Hz
<b>Total rate:</b>	390 W
<b>Absorbed Current:</b>	1,8 A
<b>Cooling capacity:</b>	713 W*
<b>*:</b>	Evap. -10°C Cond. +55°C

## Features

<b>Standard equipment:</b>	LED lighting, lock with key
<b>Control:</b>	Electronic, display flush with the panel
<b>Doors:</b>	1 door, self-closing with a 105° stop, right hinged
<b>Door gasket:</b>	Magnetic, triple chamber and easily replaceable
<b>Insulation:</b>	75 mm thickness - CFC/HCFC free
<b>Exterior/interior finishing:</b>	One-piece structure in AISI 304 stainless steel. Back in galvanized steel
<b>Inner corners:</b>	Rounded for easy cleaning and ensuring maximum hygiene
<b>Handle:</b>	Snap-in chrome with integrated lock
<b>Cosmo:</b>	Predisposed for Cosmo Hub connection


## Accessories and variants

Alimentazione frequenza 60Hz	Trolley GN2/1 20 trays 598x660x1630 mm
Other special voltage	Cosmo cable connection kit

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive wi-fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The cabinet, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, Levtronic, QUBI) or with Cosmo wi-fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

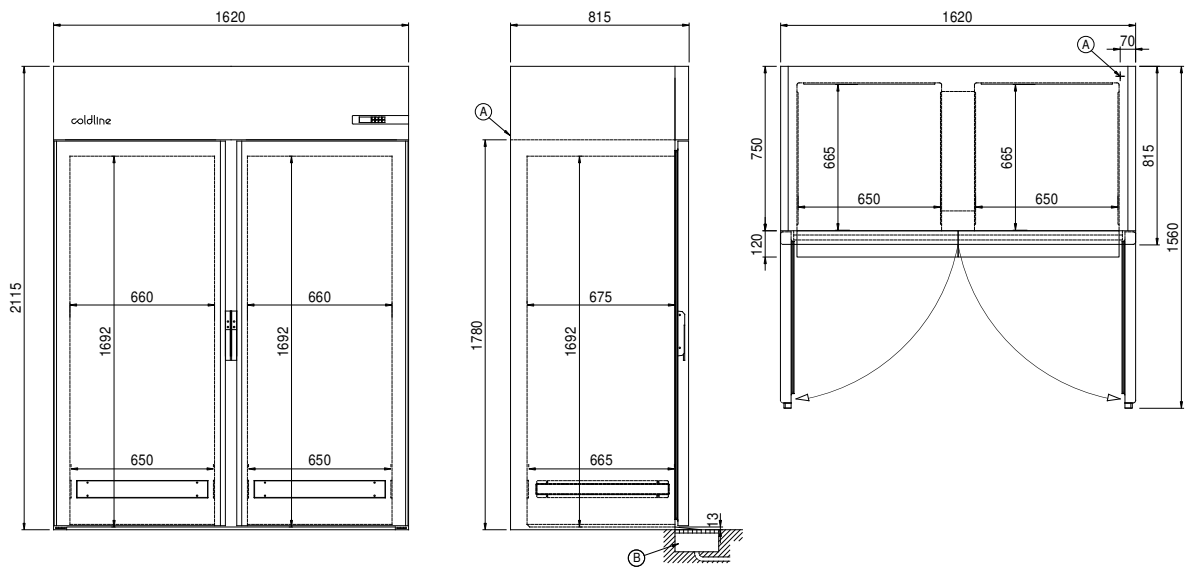

A: Power supply cable outlet

B: Condensation water drain