

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
 Project \_\_\_\_\_ Position \_\_\_\_\_

## Roll-in

**Model:** J160/2MV

**Cod:** J11160200701

Roll-in refrigerated cabinet for GN2/1 trolleys, 2 glass doors. Plug-in refrigeration unit, 4 climatic class and R290 ecological refrigerant gas. Led strip lighting, snap handle with lock and key as standard. Temperature range -2°+8°C with ventilated refrigeration hot gas defrost. 75 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free); easily replaceable triple chamber magnetic gasket. One-piece structure, interior/exterior AISI 304 stainless steel, exterior galvanised steel back. Rounded inner corners for easy cleaning. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Predisposed for connection to Cosmo remote supervision system and ModBus/RTU Rs485 connection.



## Technical data

|                            |                                 |
|----------------------------|---------------------------------|
| <b>Gross capacity:</b>     | 1679 lt                         |
| <b>Temperature range:</b>  | -2°+8°C                         |
| <b>Refrigerant unit:</b>   | Plug-in                         |
| <b>Climate class:</b>      | 4                               |
| <b>Cooling gas:</b>        | R290                            |
| <b>Defrost:</b>            | Hot gas                         |
| <b>Valve:</b>              | Supplied standard with solenoid |
| <b>Dimensions:</b>         | 1620×815×2115 mm                |
| <b>Packing dimensions:</b> | 1650×920×2260 mm                |
| <b>Gross weight:</b>       | 251 Kg                          |
| <b>Voltage:</b>            | 220-240 V - 50 Hz               |
| <b>Total rate:</b>         | 390 W                           |
| <b>Absorbed Current:</b>   | 1,8 A                           |
| <b>Cooling capacity:</b>   | 713 W*                          |
| <b>*:</b>                  | Evap. -10°C Cond. +55°C         |

## Features

|                                     |   |
|-------------------------------------|---|
| <b>Standard equipment:</b>          | LED lighting  |
| <b>Control:</b>                     | Electronic, display flush with the panel                                  |
| <b>Doors:</b>                       | 1 aluminium door, self-closing with 105° latch, right-hand hinges         |
| <b>Door gasket:</b>                 | Magnetic, triple chamber and easily replaceable                           |
| <b>Insulation:</b>                  | 75 mm thickness - CFC/HCFC free   |
| <b>Exterior/interior finishing:</b> | One-piece structure in AISI 304 stainless steel. Back in galvanized steel |
| <b>Inner corners:</b>               | Rounded for easy cleaning and ensuring maximum hygiene                    |
| <b>Handle:</b>                      | Snap-in chrome with integrated lock                                       |
| <b>Cosmo:</b>                       | Predisposed for Cosmo Hub connection                                      |


## Accessories and variants

|                              |  |
|------------------------------|--|
| Alimentazione frequenza 60Hz | Trolley GN2/1 20 trays 598x660x1630 mm |
| Other special voltage        | Cosmo cable connection kit             |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive wi-fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The cabinet, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, Levtronic, QUBI) or with Cosmo wi-fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

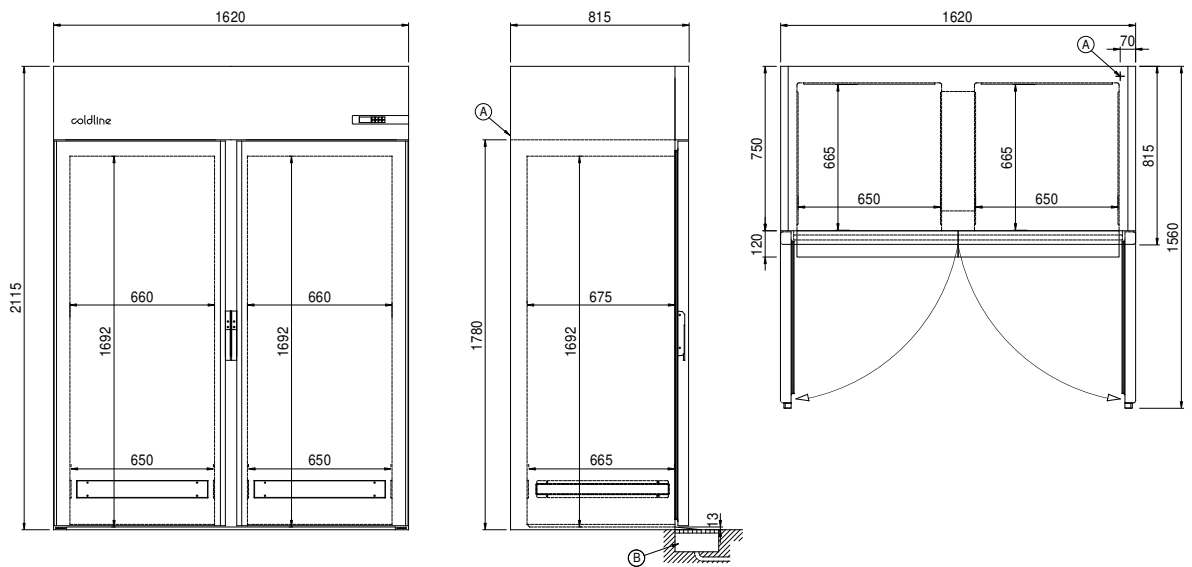

**A:** Power supply cable outlet

**B:** Condensation water drain