

Client _____ Quantity _____
 Project _____ Position _____

Pass-Through

Model: J110/2MV1

Cod: J12110200301

Pass-Through refrigerated cabinet for GN2/1 trolleys, 2 doors, one of which is a glass door. Plug-in refrigeration unit, 4 climatic class and R290 ecological refrigerant gas. Led strip lighting, snap handle with lock and key as standard. Temperature range -2°+8°C with ventilated refrigeration hot gas defrost. 75 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free); easily replaceable triple chamber magnetic gasket. One-piece structure, interior/exterior AISI 304 stainless steel, exterior galvanised steel back. Rounded inner corners for easy cleaning. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Predisposed for connection to Cosmo remote supervision system and ModBus/RTU Rs485 connection.



Technical data

Gross capacity:	838 lt
Temperature range:	-2°+8°C
Refrigerant unit:	Plug-in
Climate class:	4
Cooling gas:	R290
Defrost:	Hot gas
Valve:	Supplied standard with solenoid
Dimensions:	810×880×2115 mm
Packing dimensions:	840×920×2260 mm
Gross weight:	180 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	390 W
Absorbed Current:	1,8 A
Cooling capacity:	713 W*
*:	Evap. -10°C Cond. +55°C

Features

Standard equipment:	LED lighting
Control:	Electronic, display flush with the panel
Doors:	1 aluminium door, self-closing with 105° latch, right-hand hinges
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	75 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel. Back in galvanized steel
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Snap-in chrome with integrated lock
Cosmo:	Predisposed for Cosmo Hub connection


Accessories and variants

Alimentazione frequenza 60Hz	Trolley GN2/1 20 trays 598x660x1630 mm
Other special voltage	Cosmo cable connection kit

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive wi-fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The cabinet, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, Levtronic, QUBI) or with Cosmo wi-fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

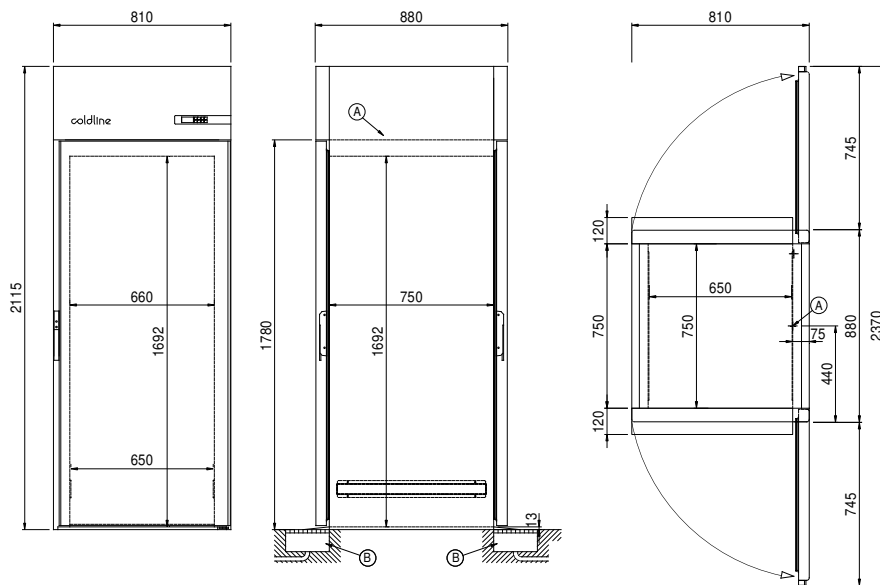

A: Power supply cable outlet

B: Condensation water drain