coldline

Client	Quantity
Project	Position

Roll-in Vision JF80

Model: JF80/1KM

Cod: J61802800101



Technical data

Gross capacity:1558 ltTemperature range:-6°+40°CHumidity range:45% - 95% with humidifierHumidifier:IncludingHumidifier:IncludingClimate class:5Cooling gas:R290 (GWP=3)Refrigerant Charge:90gDefrost:Hot gasValve:Supplied standard with solenoidDimensions:960×1276×2465 mmPacking dimensions:980×1240×2630 mmNet / gross weight:285 Kg / 297 KgNet / gross volume:706 lt / 1558 ltVoltage:220-240 V - 50 HzTotal rate:1740W - 8,0ACooling capacity:1336 W*		
Temperature range:-6°+40°CHumidity range:45% - 95% with humidifierHumidifier:IncludingRefrigerant unit:Plug-inClimate class:5Cooling gas:R290 (GWP=3)Refrigerant Charge:90gDefrost:Hot gasValve:Supplied standard with solenoidDimensions:960×1276×2465 mmPacking dimensions:980×1240×2630 mmNet / gross weight:285 Kg / 297 KgNet / gross volume:706 lt / 1558 ltVoltage:220-240 V - 50 HzTotal rate:1740W - 8,0ACooling capacity:1336 W*	Max capacity:	2 trolleys
Humidity range:45% - 95% with humidifierHumidifier:IncludingRefrigerant unit:Plug-inClimate class:5Cooling gas:R290 (GWP=3)Refrigerant Charge:90gDefrost:Hot gasValve:Supplied standard with solenoidDimensions:960×1276×2465 mmPacking dimensions:980×1240×2630 mmNet / gross weight:285 Kg / 297 KgNet / gross volume:706 lt / 1558 ltVoltage:220-240 V - 50 HzTotal rate:1740W - 8,0ACooling capacity:1336 W*	Gross capacity:	1558 lt
Humidifier:IncludingRefrigerant unit:Plug-inClimate class:5Cooling gas:R290 (GWP=3)Refrigerant Charge:90gDefrost:Hot gasValve:Supplied standard with solenoidDimensions:960×1276×2465 mmPacking dimensions:980×1240×2630 mmNet / gross weight:285 Kg / 297 KgNet / gross volume:706 lt / 1558 ltVoltage:220-240 V - 50 HzTotal rate:1740W - 8,0ACooling capacity:1336 W*	Temperature range:	-6°+40°C
Refrigerant unit:Plug-inClimate class:5Cooling gas:R290 (GWP=3)Refrigerant Charge:90gDefrost:Hot gasValve:Supplied standard with solenoidDimensions:960×1276×2465 mmPacking dimensions:980×1240×2630 mmNet / gross weight:285 Kg / 297 KgNet / gross volume:706 lt / 1558 ltVoltage:220-240 V - 50 HzTotal rate:1740W - 8,0ACooling capacity:1336 W*	Humidity range:	45% - 95% with humidifier
Climate class:5Cooling gas:R290 (GWP=3)Refrigerant Charge:90gDefrost:Hot gasValve:Supplied standard with solenoidDimensions:960×1276×2465 mmPacking dimensions:980×1240×2630 mmNet / gross weight:285 Kg / 297 KgNet / gross volume:706 lt / 1558 ltVoltage:220-240 V - 50 HzTotal rate:1740W - 8,0ACooling capacity:1336 W*	Humidifier:	Including
Cooling gas:R290 (GWP=3)Refrigerant Charge:90gDefrost:Hot gasValve:Supplied standard with solenoidDimensions:960×1276×2465 mmPacking dimensions:980×1240×2630 mmNet / gross weight:285 Kg / 297 KgNet / gross volume:706 lt / 1558 ltVoltage:220-240 V - 50 HzTotal rate:1740W - 8,0ACooling capacity:1336 W*	Refrigerant unit:	Plug-in
Refrigerant Charge:90gDefrost:Hot gasValve:Supplied standard with solenoidDimensions:960×1276×2465 mmPacking dimensions:980×1240×2630 mmNet / gross weight:285 Kg / 297 KgNet / gross volume:706 lt / 1558 ltVoltage:220-240 V - 50 HzTotal rate:1740W - 8,0ACooling capacity:1336 W*	Climate class:	5
Defrost:Hot gasValve:Supplied standard with solenoidDimensions:960×1276×2465 mmPacking dimensions:980×1240×2630 mmNet / gross weight:285 Kg / 297 KgNet / gross volume:706 lt / 1558 ltVoltage:220-240 V - 50 HzTotal rate:1740W - 8,0ACooling capacity:1336 W*	Cooling gas:	R290 (GWP=3)
Valve:Supplied standard with solenoidDimensions:960×1276×2465 mmPacking dimensions:980×1240×2630 mmNet / gross weight:285 Kg / 297 KgNet / gross volume:706 lt / 1558 ltVoltage:220-240 V - 50 HzTotal rate:1740W - 8,0ACooling capacity:1336 W*	Refrigerant Charge:	90g
Dimensions: 960×1276×2465 mm Packing dimensions: 980×1240×2630 mm Net / gross weight: 285 Kg / 297 Kg Net / gross volume: 706 lt / 1558 lt Voltage: 220-240 V - 50 Hz Total rate: 1740W - 8,0A Cooling capacity: 1336 W*	Defrost:	Hot gas
Packing dimensions: 980×1240×2630 mm Net / gross weight: 285 Kg / 297 Kg Net / gross volume: 706 lt / 1558 lt Voltage: 220-240 V - 50 Hz Total rate: 1740W - 8,0A Cooling capacity: 1336 W*	Valve:	Supplied standard with solenoid
Net / gross weight: 285 Kg / 297 Kg Net / gross volume: 706 lt / 1558 lt Voltage: 220-240 V - 50 Hz Total rate: 1740W - 8,0A Cooling capacity: 1336 W*	Dimensions:	960×1276×2465 mm
Net / gross volume: 706 lt / 1558 lt Voltage: 220-240 V - 50 Hz Total rate: 1740W - 8,0A Cooling capacity: 1336 W*	Packing dimensions:	980×1240×2630 mm
Voltage: 220-240 V - 50 Hz Total rate: 1740W - 8,0A Cooling capacity: 1336 W*	Net / gross weight:	285 Kg / 297 Kg
Total rate: 1740W - 8,0A Cooling capacity: 1336 W*	Net / gross volume:	706 lt / 1558 lt
Cooling capacity: 1336 W*	Voltage:	220-240 V - 50 Hz
	Total rate:	1740W - 8,0A
: Evan -10°C Cond +55°C	Cooling capacity:	1336 W
	*:	Evap10°C Cond. +55°C

Features

Functions:	Retarder prover, manual proving, continuous cycle, storage, chocolate, thawing, ice cream
Standard equipment:	LED lighting
Control:	7" touch screen display with USB port
Doors:	1 door, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	100 mm thickness - CFC/HCFC free
Exterior/interior finishing:	One-piece structure in AISI 304 stainless steel. Back in galvanized steel
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Snap-in chrome with integrated lock
Cosmo:	Wi-Fi remote control system

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

coldline


Accessories and variants

RAL customisable colouring Plug-in water unit Alimentazione frequenza 60Hz Other special voltage Purity C Quell ST 50 filter cartridge Trolley EN60x80 20 trays 660x820x1750 mm

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows VISION retarder provers to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

Technical draw

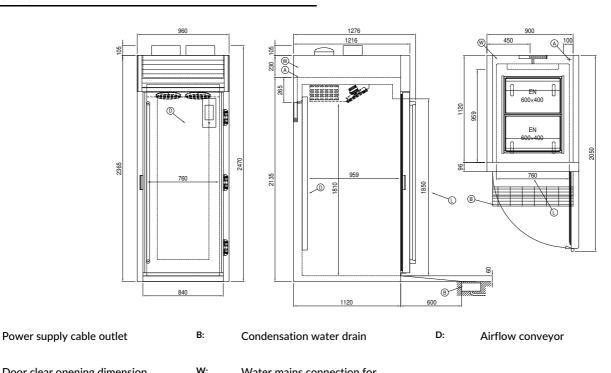

L: Door clear opening dimension

A:

Water mains connection for humidifier - 3/4" female. Unloading not required

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.