

Client	Quantity
Project	Position

# **Roll-in Vision JC80**

Model: JC80/1KM Cod: J61804800101



## **Technical data**

Max capacity:	2 trolleys
Gross capacity:	1558 lt
Temperature range:	-5°+15°C
Humidity range:	90% - 40% (T°C >+4°C)
Refrigerant unit:	Plug-in
Climate class:	5
Cooling gas:	R290 (GWP=3)
Refrigerant Charge:	90g
Defrost:	Hot gas
Valve:	Supplied standard with solenoid
Dimensions:	960×1276×2465 mm
Packing dimensions:	980×1240×2630 mm
Net / gross weight:	280 Kg / 292 Kg
Net / gross volume:	706 lt / 1558 lt
Voltage:	220-240 V - 50 Hz
Total rate:	1740W - 8,0A
Cooling capacity:	1336 W*
*:	Evap10°C Cond. +55°C

## **Features**

Storage, chocolate, thawing, ice cream  LED lighting  7" touch screen display with USB port
7" touch scroon display with LISP port
/ Louch screen display with OSB port
1 door, self-closing, reversible with 105° stop
Magnetic, triple chamber and easily replaceable
100 mm thickness - CFC/HCFC free
One-piece structure in AISI 304 stainless steel. Back in galvanized steel
Rounded for easy cleaning and ensuring maximum hygiene
Snap-in chrome with integrated lock
Wi-Fi remote control system

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



### Accessories and variants

RAL customisable colouring

Other special voltage

Plug-in water unit

Alimentazione frequenza 60Hz


Trolley EN60x80 20 trays 660x820x1750 mm

Serial interface, RS485 cable

### COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows VISION storage units to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

#### **Technical draw**

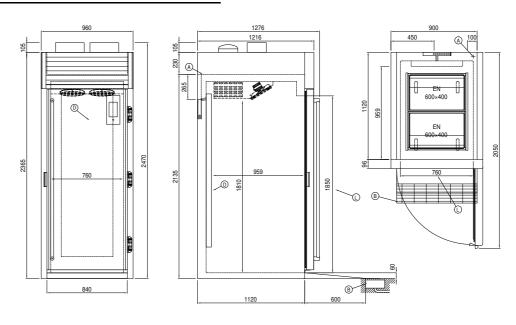

- A: Power supply cable outlet
- B: Condensation water drain
- D: Airflow conveyor

L: Door clear opening dimension

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.