

Client _____ Quantity _____
 Project _____ Position _____

Roll-in Vision JC80

Model: JC80/1KMR

Cod: J61805800101



Vision JC80 storage cabinet, 1 door, temperature range $-5^{\circ}+15^{\circ}\text{C}$. It is equipped with the functions: storage, thawing, chocolate. Remote refrigeration unit, 5 heavy duty climatic class and R452a refrigerant gas. Electric defrost, adjustable ventilation 25-100% and adjustable humidity 45-95% for the chocolate function. 7" touch screen and operating mode with customisable recipes. For trolley EN60x80, access ramp included. led strip lighting, Electronic expansion valve and anti-corrosion painted evaporator. 100 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free); easily replaceable triple chamber magnetic gasket. AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Interior/exterior AISI 304 stainless steel; external back in galvanised steel. 2 compressors and 2 independent refrigeration circuits. Cosmo: wi-fi connection for remote monitoring via Cosmo App. When wired to Coldline counters and cabinets acts as a hub for remote monitoring of connected equipment.

Technical data

Max capacity:	2 trolleys EN60x40
Gross capacity:	1558 lt
Temperature range:	$-5^{\circ}+15^{\circ}\text{C}$
Humidity range:	90% - 40% ($\text{T}^{\circ}\text{C} > +4^{\circ}\text{C}$)
Refrigerant unit:	remote
Cooling gas:	R452a (GWP=2.141)
Defrost:	Electric
Valve:	Supplied standard with solenoid
Dimensions:	960x1276x2465 mm
Packing dimensions:	980x1240x2630 mm
Net / gross weight:	260 Kg / 272 Kg
Net / gross volume:	706 lt / 1558 lt
Voltage:	220-240 V - 50-60 Hz
Total rate:	790W - 3,6A
Cooling capacity:	1336 W*
*:	Evap. -10°C Cond. $+55^{\circ}\text{C}$

Features

Functions:	Storage, chocolate, thawing, ice cream
Standard equipment:	LED lighting
Control:	7" touch screen display with USB port
Doors:	1 door, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	100 mm thickness - CFC/HCFC free
Exterior/interior finishing:	One-piece structure in AISI 304 stainless steel. Back in galvanized steel
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Snap-in chrome with integrated lock
Cosmo:	Wi-Fi remote control system

Accessories and variants

RAL customisable colouring	Remote condensing unit NEK6210GK
Alimentazione frequenza 60Hz	Trolley EN60x80 20 trays 660x820x1750 mm
Other special voltage	Serial interface, RS485 cable


Remote unit technical data

Voltage:	220-240 V - 50 Hz
Unit total rate :	500W - 2,3A
Cooling gas:	R452A
Gross weight:	16 Kg
Dimensions:	480x330x295 mm
Pipe delivery:	Ø 1/4"
Pipe suction:	Ø 3/8"
Packing dimensions:	540x345x310 mm
Cooling capacity:	Evap. -10°C Cond. +55°C

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows VISION storage units to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

Technical draw

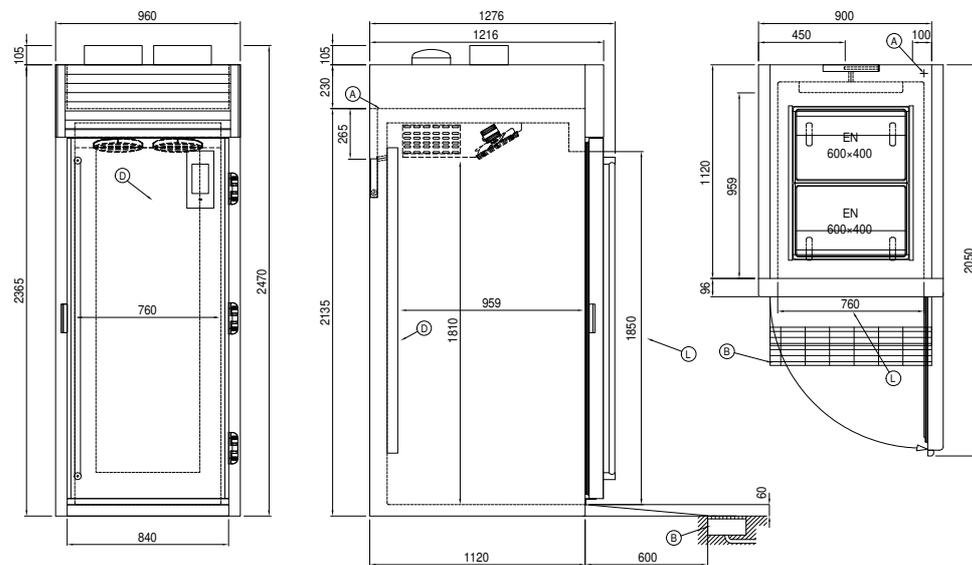

- A: Power supply cable outlet B: Condensation water drain D: Airflow conveyor
- L: Door clear opening dimension

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.