

| Client  | Quantity |
|---------|----------|
| Project | Position |

# Tavolo Snack GN 2 porte BT

Model: TS12/1B-490 Cod: T10280000404



## **Technical data**

| Toni                     | Without top                     |
|--------------------------|---------------------------------|
| Тор:                     |                                 |
| Gross capacity:          | 177 lt                          |
| Temperature range:       | -15°-22°C                       |
| Refrigerant unit:        | Plug-in                         |
| Energetic class:         | D                               |
| Energy efficiency index: | 51,3                            |
| Annual consumption:      | 1535 kW/h annum                 |
| 24h consumption:         | 4,205 kW/h/24h                  |
| Climate class:           | 5                               |
| Cooling gas:             | R290 (GWP=3)                    |
| Refrigerant Charge:      | 110g                            |
| Defrost:                 | Hot gas                         |
| Body height:             | 490 mm                          |
| Valve:                   | Supplied standard with solenoid |
| Dimensions:              | 1200×680×590 mm                 |
| Packing dimensions:      | 1395×800×998 mm                 |
| Net / gross weight:      | 105 Kg / 115 Kg                 |
| Net / gross volume:      | 105 lt / 177 lt                 |
| Voltage:                 | 220-240 V - 50 Hz               |
| Total rate:              | 850W - 3,9A                     |
| Cooling capacity:        | 569 W*                          |
| *:                       | Evap30°C Cond. +55°C            |
|                          |                                 |

## **Features**

| Standard equipment:          | 2 slides, 2 plastic coated GN1/1 shelves                                           |
|------------------------------|------------------------------------------------------------------------------------|
| Control:                     | Electronic, display flush with the panel                                           |
| Doors:                       | 2 doors, self-closing, reversible with 105° stop                                   |
| Door gasket:                 | Magnetic, triple chamber and easily replaceable                                    |
| Insulation:                  | 60 mm thickness - CFC/HCFC free                                                    |
| Exterior/interior finishing: | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel. |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene                             |
| Handle:                      | Stainless steel AISI 304, 2 mm thick                                               |
| Racks and slides:            | Stainless steel AISI 304                                                           |
| Feets:                       | AISI 304 stainless steel adjustable h 100/150 mm                                   |
| Cosmo:                       | Predisposed for Cosmo Hub connection                                               |
|                              |                                                                                    |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



### Accessories and variants


| Drawers 1/1                           |
|---------------------------------------|
| Drawers 1/2                           |
| Drawers 1/1                           |
| Special size of technical compartment |
| Technical compartment on the left     |
| Drawers 1/2                           |
| Special size of technical compartment |
| Lock with key for drawer 1/1          |
| Lock with key for drawer 1/2          |
| Technical compartment on the left     |
| Lock with key for drawer 1/1          |
| RAL customisable colouring            |
| Plug-in water unit                    |
| Lock with key for drawer 1/2          |
| RAL customisable colouring            |
| Alimentazione frequenza 60Hz          |
| Other special voltage                 |

| Plug-in water unit                            |         |
|-----------------------------------------------|---------|
| Alimentazione frequenza 60Hz                  |         |
| Other special voltage                         |         |
| Adjustable feet h 145/195 mm                  |         |
| 4 Swivel and brake castors h 128 mm           |         |
| Brackets for GN pans for drawer               |         |
| GN1/2 container + lids kit for drawer, h 1    | 50 mm   |
| GN1/3 container + lids kit for drawer, h 1    | 50 mm   |
| Bottles shelf, stainless steel coating for sh | elf 350 |
| Stainless steel shelf GN1/1                   |         |
| Plastic coated shelf GN1/1                    |         |
| Pair of type C slides 505 mm                  |         |
| IP44 schuko socket with cover                 |         |
| Serial interface, RS485 cable                 |         |
| Cosmo cable connection kit                    |         |
| Cosmo wifi connection kit                     |         |
| Removable plinth GN 2D h 100 mm               |         |

### COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

#### **Technical draw**

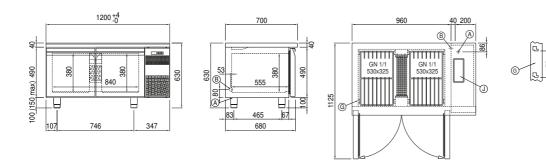

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.