


Client _____ Quantity _____

Project _____ Position _____

Display case for ingredients 2560 mm

Model: VP25/13NLR

Cod: V42251110001



Technical data

Gross capacity:	106 lt
Temperature range:	+2°+10°C
Refrigerant unit:	remote
Cooling gas:	R452a (GWP=2.141)
Valve:	Supplied standard with solenoid
Dimensions:	2560×380×485 mm
Packing dimensions:	2620×450×473 mm
Net / gross weight:	65 Kg / 75 Kg
Net / gross volume:	/ 106 lt
Voltage:	220-240 V - 50-60 Hz
Total rate:	22W - 0,1A
Cooling capacity:	368 W*
*:	Evap. -10°C Cond. +55°C

Features

Control:	Electronic, display flush with the panel
Insulation:	30 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Cosmo:	Predisposed for Cosmo Hub connection

Accessories and variants

Alimentazione frequenza 60Hz	Pan GN1/3 325x176x150 mm
Other special voltage	Lid for GN1/3 pan
Remote condensing unit EMT6144GK	Pan GN1/6 176x162x150 mm
2560 display case pans kit, GN1/3	Lid for GN1/6 pan
Wall clamps, 2 pieces	Pan GN1/9 176x108x100 mm
Kit of 4 stainless steel feet	Lid for GN1/9 pan
Cosmo cable connection kit	Pan GN2/8 325x132x150 mm
Cosmo wifi connection kit	Lid for GN2/8 pan
Pan GN1/2 325x265x150 mm	Brackets for pans 20 mm GN1/3
Lid for GN1/2 pan	Brackets for pans 25 mm GN1/3


Remote unit technical data

Voltage:	220-240 V - 50 Hz
Assorbimento Unità Remota:	250W - 1,1A
Cooling gas:	R404-R452
Gross weight:	17 Kg
Dimensions:	450x300x270 mm
Pipe delivery:	Ø 1/4"
Pipe suction:	Ø 3/8"
Packing dimensions:	470x330x300 mm
Cooling capacity:	Evap. -10°C Cond. +55°C

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The display case for ingredients, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

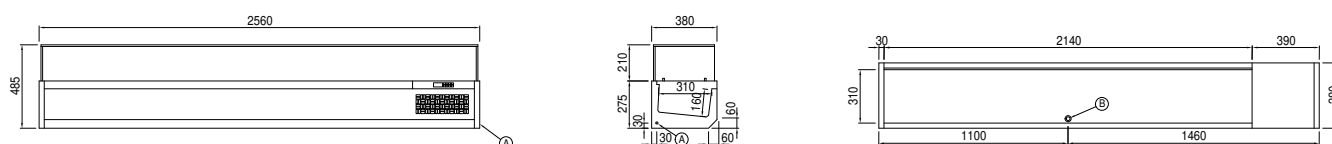

A: Power supply cable outlet

B: Condensation water drain