

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
 Project \_\_\_\_\_ Position \_\_\_\_\_

## Vision Industry W35K F

**Model:** W35KFR

**Cod:** W81110112002



Vision Industry W35 trolley blast chiller Roll-In F version, temperature range -40°+65°C with humidifier boiler as standard. It is equipped with the functions: blast chilling, blast freezing, manual cycle, thawing, proving, retarded proving, holding, steam sanitising. Remote cooling system with R452a refrigerant gas. Devote™ - Dynamic Evolution Temperature - the innovative system that autonomously recognises the weight, size and temperature of food and automatically shortens the blast chilling or freezing time of hot food without the use of a core probe. 7" touch screen and operating mode with customisable recipes, by time, with core probe or with Devote algorithm. Adjustable ventilation 25-100%, adjustable humidity 45-95%. Blast chilling yield +90/+3°C - 100 Kg; blast freezing yield +90/-18°C - 80 Kg. 5 heavy duty climatic class, forced air defrost. 100 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). Electronic expansion valve and anti-corrosion painted evaporator. Compensation valve to reduce waiting times during frequent door openings. Easily replaceable triple chamber magnetic gasket, core probe with screw connector and led lighting. Exterior and interior AISI 304 stainless steel, interior made of "canvas" steel with special highly durable texture. fan unit and condenser cover removable without tools. Blast chiller supplied assembled. ModBus/RTU Rs485 connection as standard. Cosmo: wi-fi connection for remote monitoring via Cosmo App. When wired to Coldline counters and cabinets acts as a hub for remote monitoring of connected equipment.

### Technical data

<b>Max capacity:</b>	1 trolley GN1/1, EN60x40
<b>Temperature range:</b>	-40°+65°C
<b>Ventilation range:</b>	25% - 100%
<b>Humidity range:</b>	45% - 95% with humidifier
<b>Humidifier:</b>	Including
<b>Refrigerant unit:</b>	remote
<b>Yield +90/+3:</b>	100 Kg
<b>Yield +90/-18:</b>	80 Kg
<b>Cooling gas:</b>	R404/R452
<b>Defrost:</b>	Forced air
<b>Valve:</b>	Electronic expansion valve
<b>Dimensions:</b>	1230×1200×2510 mm
<b>Packing dimensions:</b>	1464×1364×2550 mm
<b>Gross weight:</b>	340 Kg
<b>Voltage:</b>	400-415 V - 50-60 Hz

### Features

<b>Functions:</b>	Blast chilling, shock freezing, thawing, proving and retarder prover, holding, steam sanitizing, manualcycle
<b>Control:</b>	7" touch screen display with USB port
<b>Door gasket:</b>	Magnetic, triple chamber and easily replaceable
<b>Core probe:</b>	Needle probe with 1 reading point, quick-release and easily replaceable
<b>Insulation:</b>	100 mm thickness - CFC/HCFC free
<b>Exterior/interior finishing:</b>	Internal and external in "linen canvas" steel
<b>Inner corners:</b>	Rounded base 20 mm
<b>Handle:</b>	In AISI 304 stainless steel
<b>Cosmo:</b>	Wi-Fi remote control system

## Accessories and variants

Abbattitore fornito smontato	Other special voltage
Floor 20 mm high, ramp included	Open remote condensing unit 4EES-4Y
Reverse door opening from standard	Silenced faired remote condensing unit 4EES-4Y + winter kit -20°
Door opening turning and control panel inversion	PVC ventilation profiles W35K
Door stop 100°	Ramp 100 mm high. Length 913 mm W35
Sonda al cuore 3 punti di lettura	Ramp 140 mm high. Length 1390 mm W35
Sonda al cuore riscaldata 1 punto di lettura	Trolley GN1/1 20 trays 598x530x1630 mm
Winter kit -20°C	Trolley EN60x40 20 trays 460x620x1750 mm
Winter kit -40°C	Purity C Quell ST 50 filter cartridge


## Remote unit technical data

<b>Voltage:</b>	400-415 V 3N - 50 Hz
<b>Cooling gas:</b>	R404-R452a
<b>HP unit:</b>	4
<b>Gross weight:</b>	187 Kg
<b>Dimensions:</b>	1110×785×626 mm
<b>Cooling capacity:</b>	Evap. -10°C Cond. +45°C

## COSMO - wi-fi control

Cosmo è l'esclusiva tecnologia wi-fi di The Nice Kitchen che permette di connettere, aggiornare e monitorare da smartphone l'abbattitore VISION. VISION è anche un Cosmo hub e consente la supervisione remota degli apparecchi Coldline a lui collegati. Dall'app potrai controllare le condizioni di funzionamento di ogni macchina e ricevere alert in caso di funzionamento anomalo.

## Technical draw

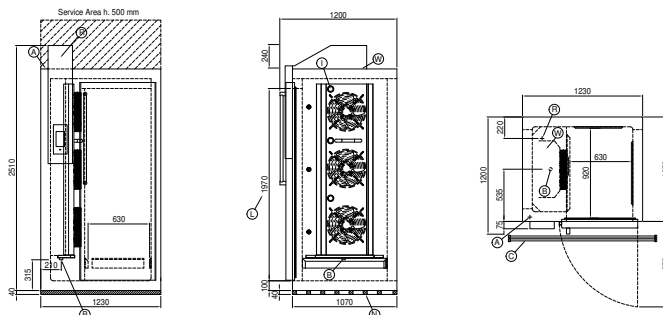

<b>A:</b>	Power supply cable outlet	<b>B:</b>	Condensation water drain	<b>C:</b>	Floor grid for condensate drainage (recommended)
<b>I:</b>	Internal led lighting	<b>L:</b>	Door clear opening dimension	<b>N:</b>	PVC ventilation profiles
<b>R:</b>	Gas output pipes	<b>W:</b>	Water mains connection for humidifier - 3/4" female. Unloading not required		