

Client _____ Quantity _____
Project _____ Position _____

Modi Active Blast Chiller

Model: W7AL

Cod: W51076000011



Technical data

| | |
|---------------------|--|
| Top: | Thickness 4 cm. Reinforced in order to place an oven |
| Max capacity: | 9 basins 3 |
| Gross capacity: | 238 lt |
| Temperature range: | -40°+65°C |
| Ventilation range: | 25% - 100% |
| Humidifier: | Not available |
| Refrigerant unit: | Plug-in |
| Yield +90/+3: | 34 Kg |
| Yield +90/-18: | 25 Kg |
| Climate class: | 5 |
| Cooling gas: | R290 (GWP=3) |
| Refrigerant Charge: | 150g |
| Defrost: | Hot gas |
| Valve: | Electronic expansion valve |
| Dimensions: | 780×800×1093 mm |
| Packing dimensions: | 875×915×1141 mm |
| Net / gross weight: | 145 Kg / 155 Kg |
| Net / gross volume: | / 238 lt |
| Voltage: | 220-240 V - 50 Hz |
| Total rate: | 2153 W - 9,4 A |
| Cooling capacity: | 2368 W* |
| *: | Evap. -10°C Cond. +40°C |
| Noise: | 60,4 dB |

Features

| | |
|------------------------------|---|
| Functions: | Blast chilling, shock freezing, thawing, proving, holding, desiccation, chocolate, manual cycle |
| Standard equipment: | 2 slides EN60x40, 2 plastic coated EN60x40 shelves |
| Control: | 4,3" touch screen display with USB port |
| Doors: | Cushioned, with anti-odor system |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Core probe: | Needle probe with 1 reading point, quick-release and easily replaceable |
| Insulation: | 60 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304, quick release |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Wi-Fi remote control system |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.


Accessories and variants

| | |
|--|--|
| RAL customisable colouring | 4 Swivel and brake castors h 128 mm |
| Sonda al cuore a 3 punti di lettura | Aluminium coated backingan EN60x40 h 20 mm |
| Sonda al cuore riscaldata a 1 punto di lettura | Stainless steel shelf EN60x40 |
| Reverse door opening from standard | Plastic coated shelf EN60x40 |
| Other special voltage | Pair of type L slides 398 mm EN |
| Lowered foot h 55/70 mm | Sterilizing UV lamp |

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows MODI blast chillers to be connected, updated and monitored from smartphones. MODI is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

Technical draw

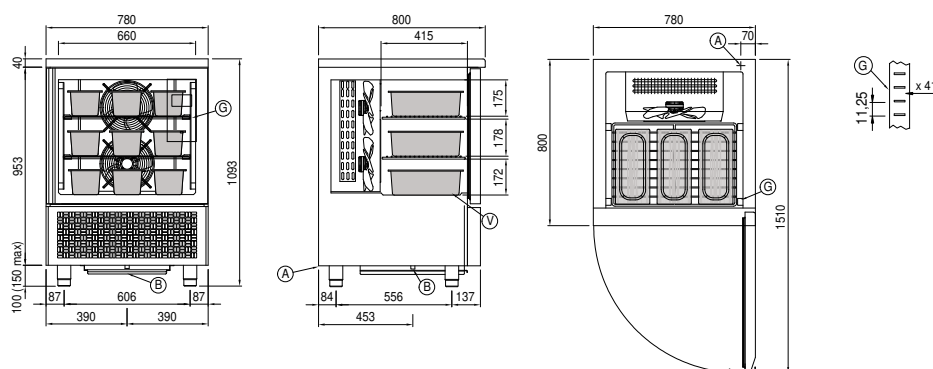

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

V: Basins 360x165x120h (not included)