Client _____ Quantity _____

Project _____ Position _____

## Arkis Modi Up Blast Chiller Counter

**Model:** WHP7UR-710 **Cod:** W19075011001



### Technical data

| | |
|---|---|
| **Top:** | Thickness 4 cm. Reinforced in order to place an oven |
| **Gross capacity:** | 248 lt |
| **Temperature range:** | -40°+10°C |
| **Ventilation range:** | 25% - 100% |
| **Humidifier:** | Not available |
| **Refrigerant unit:** | remote |
| **Yield +90/+3:** | 32 kg |
| **Yield +90/-18:** | 24 kg |
| **Cooling gas:** | R290 (GWP=3) |
| **Defrost:** | Hot gas |
| **Body height:** | 710 mm |
| **Valve:** | Electronic expansion valve |
| **Dimensions:** | 1400×700×850 mm |
| **Packing dimensions:** | 1545×900×998 mm |
| **Net / gross weight:** | 125 Kg / 135 Kg |
| **Net / gross volume:** | / 248 lt |
| **Voltage:** | 220-240 V - 50-60 Hz |
| **Total rate:** | 150 W - 0,72 A |
| **Cooling capacity:** | 2368 W* |
| *: | Evap. -10°C Cond. +45°C |

### Features

| | |
|---|---|
| **Functions:** | Blast chilling, shock freezing, continuous cycle |
| **Standard equipment:** | 7 slides GN1/1, EN60x40 |
| **Control:** | 4,3" touch screen display with USB port |
| **Door gasket:** | Magnetic, triple chamber and easily replaceable |
| **Core probe:** | Needle probe with 1 reading point, quick-release and easily replaceable |
| **Insulation:** | 60 mm thickness - CFC/HCFC free |
| **Exterior/interior finishing:** | Exterior and interior AISI 304 stainless steel. |
| **Inner corners:** | Rounded for easy cleaning and ensuring maximum hygiene |
| **Handle:** | Stainless steel AISI 304, 2 mm thick |
| **Racks and slides:** | Stainless steel AISI 304, quick release |
| **Feets:** | AISI 304 stainless steel adjustable h 100/150 mm |
| **Cosmo:** | Wi-Fi remote control system |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.


## Remote unit technical data

| | |
|---|---|
| **Voltage:** | 220-240 V - 50 Hz |
| **Cooling gas:** | R404-R452a |
| **Gross weight:** | 25 Kg |
| **Dimensions:** | 650×650×400 mm |
| **Pipe delivery:** | 10 mm |
| **Pipe suction:** | 10 mm |
| **Cooling capacity:** | Evap. -10°C Cond. +45°C |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows MODI blast chillers to be connected, updated and monitored from smartphones. MODI is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

## Technical draw

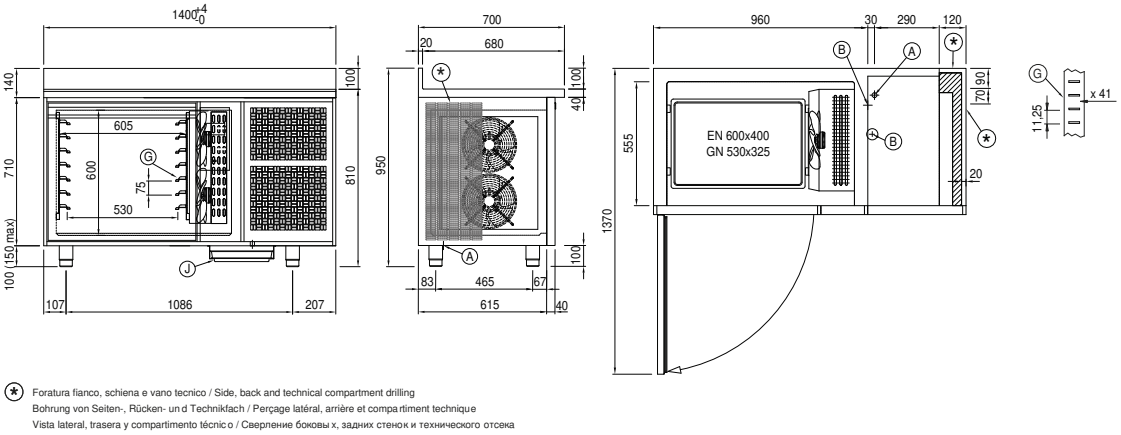


**A:** Power supply cable outlet

**B:** Condensation water drain

**G:** Racks pitch

**J:** Automatic evaporation of condensing water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.