

Client _____ Quantity _____

Project _____ Position _____

Snack Arkis GN counter 1 door

Model: HP09/1MR-SVT200-490

Cod: H80131000204



Technical data

| | |
|---------------------|---------------------------------|
| Top: | With top |
| Gross capacity: | 76 lt |
| Temperature range: | -2°+8°C |
| Refrigerant unit: | remote |
| Cooling gas: | R452a (GWP=2.141) |
| Defrost: | Electric |
| Body height: | 490 mm |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 680×700×630 mm |
| Packing dimensions: | 915×800×998 mm |
| Net / gross weight: | 50 Kg / 60 Kg |
| Net / gross volume: | 53 lt / 76 lt |
| Voltage: | 220-240 V - 50-60 Hz |
| Total rate: | 710W - 3,2A |
| Cooling capacity: | 368 W* |
| *: | Evap. -10°C Cond. +55°C |

Features

| | |
|------------------------------|--|
| Standard equipment: | 1 slide, 1 plastic coated GN1/1 shelf |
| Control: | Electronic, display flush with the panel |
| Doors: | 1 door with 180° opening |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 60 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Predisposed for Cosmo Hub connection |


Remote unit technical data

| | |
|---------------------|-------------------------|
| Voltage: | 220-240 V - 50 Hz |
| Unit total rate : | 250W - 1,1A |
| Cooling gas: | R404-R452 |
| Gross weight: | 17 Kg |
| Dimensions: | 450×300×270 mm |
| Pipe delivery: | Ø 1/4" |
| Pipe suction: | Ø 3/8" |
| Packing dimensions: | 470×330×300 mm |
| Cooling capacity: | Evap. -10°C Cond. +55°C |

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

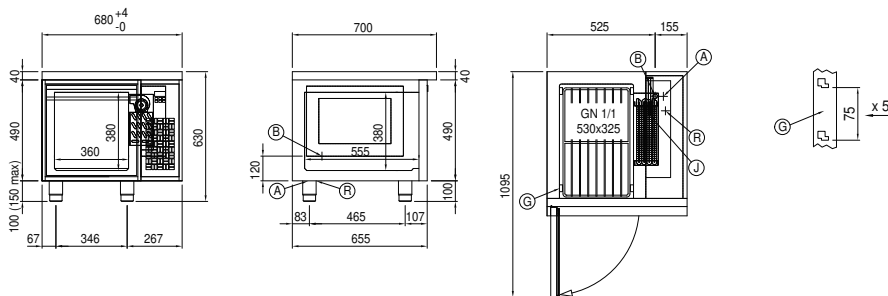

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

J: Automatic evaporation of condensing water

R: Gas output pipes