Client _____ Quantity _____

Project _____ Position _____

## Saladette Arkis GN counter 2 doors

**Model:** HA13/1MDR-SVT200-710 **Cod:** H80232000211



### Technical data

| | |
|---|---|
| **Top:** | With top and splashback |
| **Gross capacity:** | 280 lt |
| **Temperature range:** | -2°+8°C |
| **Refrigerant unit:** | remote |
| **Cooling gas:** | R452a (GWP=2.141) |
| **Defrost:** | Electric |
| **Body height:** | 710 mm |
| **Valve:** | Supplied standard with solenoid |
| **Dimensions:** | 1160×700×950 mm |
| **Packing dimensions:** | 1395×800×998 mm |
| **Net / gross weight:** | 95 Kg / 105 Kg |
| **Net / gross volume:** | / 280 lt |
| **Voltage:** | 220-240 V - 50-60 Hz |
| **Total rate:** | 810W - 3,7A |
| **Cooling capacity:** | 519 W* |
| *: | Evap. -10°C Cond. +55°C |

### Features

| | |
|---|---|
| **Standard equipment:** | 2 slides, 2 plastic coated GN1/1 shelves |
| **Control:** | Electronic, display flush with the panel |
| **Doors:** | 2 doors with 180° opening |
| **Door gasket:** | Magnetic, triple chamber and easily replaceable |
| **Insulation:** | 60 mm thickness - CFC/HCFC free |
| **Exterior/interior finishing:** | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel. |
| **Inner corners:** | Rounded for easy cleaning and ensuring maximum hygiene |
| **Handle:** | Stainless steel AISI 304, 2 mm thick |
| **Racks and slides:** | Stainless steel AISI 304 |
| **Feets:** | AISI 304 stainless steel adjustable h 100/150 mm |
| **Cosmo:** | Predisposed for Cosmo Hub connection |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.


## Remote unit technical data

| | |
|---|---|
| **Voltage:** | 220-240 V - 50 Hz |
| **Unit total rate :** | 330W - 1,5A |
| **Cooling gas:** | R452A |
| **Gross weight:** | 17 Kg |
| **Dimensions:** | 450×300×270 mm |
| **Pipe delivery:** | Ø 1/4" |
| **Pipe suction:** | Ø 3/8" |
| **Packing dimensions:** | 470×330×300 mm |
| **Cooling capacity:** | Evap. -10°C Cond. +55°C |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

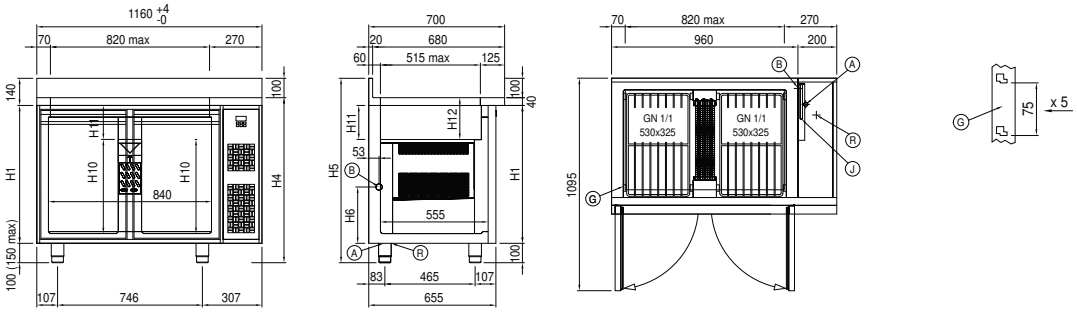


**A:** Power supply cable outlet

**B:** Condensation water drain

**G:** Racks pitch

**J:** Automatic evaporation of condensing water

**R:** Gas output pipes

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.