

Client _____ Quantity _____
Project _____ Position _____

Smart 1200 cabinet

Model: A120/2NE

Cod: A12120100201



Technical data

| | |
|--------------------------|---------------------------------|
| Gross capacity: | 1155 lt |
| Temperature range: | 0°+10°C |
| Refrigerant unit: | Plug-in |
| Energetic class: | B |
| Energy efficiency index: | 30,5 |
| Annual consumption: | 553 kW/h annum |
| 24h consumption: | 1,515 kW/h/24h |
| Climate class: | 5 |
| Cooling gas: | R290 (GWP=3) |
| Refrigerant Charge: | 105g |
| Defrost: | Off cycle automatic |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 1480×715×2085 mm |
| Packing dimensions: | 1575×930×2144 mm |
| Net / gross weight: | 195 Kg / 221 Kg |
| Net / gross volume: | 733 lt / 1155 lt |
| Voltage: | 220-240 V - 50 Hz |
| Total rate: | 260W - 1,2A |
| Cooling capacity: | 533 W* |
| *: | Evap. -10°C Cond. +55°C |

Features

| | |
|------------------------------|--|
| Standard equipment: | 6 slides for 53x53 cm shelves, 6 plastic coated 53x53 cm shelves, lock with key |
| Control: | Electronic, display flush with the panel |
| Doors: | 2 doors, self-closing with a 105° stop, right hinged |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 75 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | In PVC |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Predisposed for Cosmo Hub connection |


Accessories and variants

| | |
|-------------------------------------|-------------------------------|
| Alimentazione frequenza 60Hz | 2 doors LED lighting |
| Other special voltage | Plastic coated shelf 53x53 |
| Half doors (4 doors) Smart | Pair of type C slides 505 mm |
| Frame for fixed masonry plinth | Intermediate shelf connection |
| Foot pedal kit | Serial interface, RS485 cable |
| 4 Swivel and brake castors h 128 mm | Cosmo cable connection kit |

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The cabinet, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

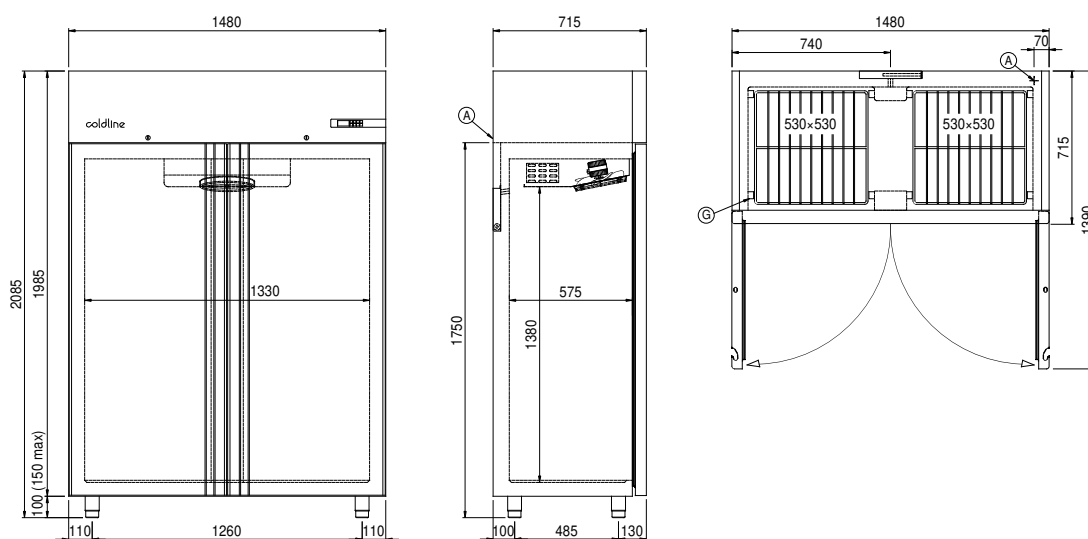

A: Power supply cable outlet

D: Airflow conveyor

G: Racks pitch