

Client \_\_\_\_\_ Quantity \_\_\_\_\_

Project \_\_\_\_\_ Position \_\_\_\_\_

## Smart Blast Chiller

Model: W5XG

Cod: W11033010021



### Technical data

Gross capacity:	102 lt
Temperature range:	-40°+10°C
Humidifier:	Not available
Refrigerant unit:	Plug-in
Energetic class:	/
Yield +90/+3:	18 Kg
Yield +90/-18:	13 Kg
Climate class:	5
Cooling gas:	R290 (GWP=3)
Refrigerant Charge:	150 g
Defrost:	Forced air
Valve:	Mechanical expansion
Dimensions:	710×700×843 mm
Packing dimensions:	805×800×901 mm
Net / gross weight:	100 Kg / 110 Kg
Net / gross volume:	/ 102 lt
Voltage:	220-240 V - 50 Hz
Total rate:	795 W - 4,6 A
Cooling capacity:	1389 W*
*:	Evap. -10°C Cond. +40°C
Noise:	59,4 dB


### Features

Functions:	Soft blast chilling, hard blast chilling, hard shock freezing, continuous cycle
Standard equipment:	Support for 5 positions GN1/1
Control:	Electronic, display flush with the panel
Doors:	Reversible and self-closing with anti-odour system
Door gasket:	Magnetic, triple chamber and easily replaceable
Core probe:	Needle probe with 1 reading point
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	In PVC
Racks and slides:	Structure in stainless steel wire AISI 304
Feets:	AISI 304 stainless steel, h 18 mm

**COSMO - wi-fi control**

Connection to Cosmo is not available for this blast chiller model.

**Technical draw**

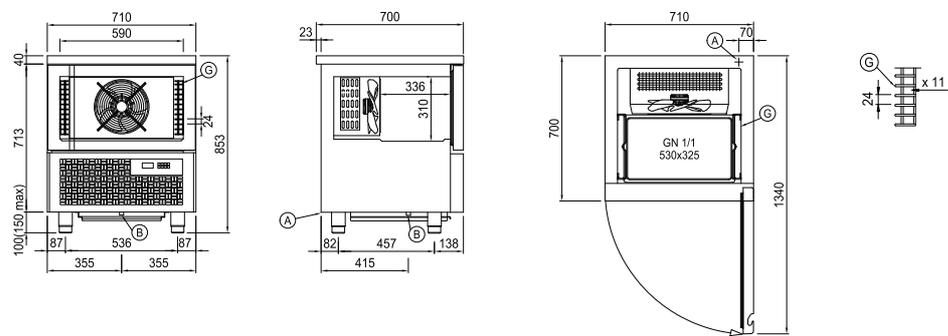

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.