Client _____ Quantity _____

Project _____ Position _____

Smart Blast Chiller

Model: W14X **Cod:** W11143000021



Technical data

Gross capacity:	463 lt
Temperature range:	-40°+10°C
Humidifier:	Not available
Refrigerant unit:	Plug-in
Yield +90/+3:	70 kg
Yield +90/-18:	55 kg
Climate class:	5
Cooling gas:	R290 (GWP=3)
Refrigerant Charge:	150 +150 g
Defrost:	Forced air
Valve:	Mechanical expansion
Dimensions:	780×800×1768 mm
Packing dimensions:	875×915×1840 mm
Net / gross weight:	195 Kg / 205 Kg
Net / gross volume:	/ 463 lt
Voltage:	400 V - 3N - 50 Hz
Total rate:	6582 W - 10,0 A
Cooling capacity:	5650 W*
*:	Evap. -10°C Cond. +40°C
Noise:	69,8 dB

Features


Functions:	Soft blast chilling, hard blast chilling, hard shock freezing, continuous cycle
Standard equipment:	14 slides GN1/1, EN60x40
Control:	Electronic, display flush with the panel
Doors:	Reversible and self-closing with anti-odour system
Door gasket:	Magnetic, triple chamber and easily replaceable
Core probe:	Needle probe with 1 reading point
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	In PVC
Racks and slides:	Stainless steel AISI 304, quick release
Feets:	AISI 304 stainless steel, h 18 mm

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

COSMO - wi-fi control

Connection to Cosmo is not available for this blast chiller model.

Technical draw

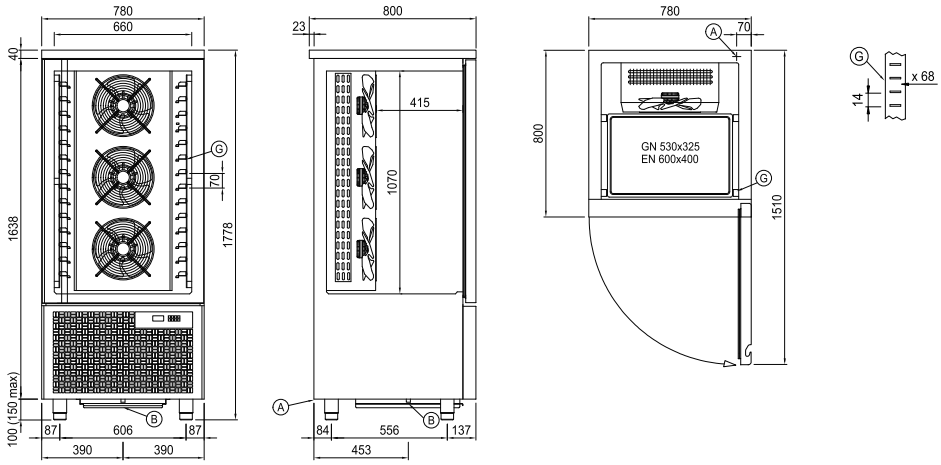

A: Power supply cable outlet **B:** Condensation water drain **G:** Racks pitch

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.