

Client \_\_\_\_\_ Quantity \_\_\_\_\_

Project \_\_\_\_\_ Position \_\_\_\_\_

## Smart Blast Chiller

Model: W14X

Cod: W1114300021



### Technical data

Gross capacity:	463 lt
Temperature range:	-40°+10°C
Humidifier:	Not available
Refrigerant unit:	Plug-in
Energetic class:	/
Yield +90/+3:	70 Kg
Yield +90/-18:	55 Kg
Climate class:	5
Cooling gas:	R290 (GWP=3)
Refrigerant Charge:	150 +150 g
Defrost:	Forced air
Valve:	Mechanical expansion
Dimensions:	780×800×1768 mm
Packing dimensions:	875×915×1826 mm
Net / gross weight:	195 Kg / 205 Kg
Net / gross volume:	/ 463 lt
Voltage:	400 V - 3N - 50 Hz
Total rate:	3043 W - 14,7 A
Cooling capacity:	5650 W*
*:	Evap. -10°C Cond. +40°C
Noise:	69,8 dB

### Features


Functions:	Soft blast chilling, hard blast chilling, hard shock freezing, continuous cycle
Standard equipment:	14 slides GN1/1, EN60x40
Control:	Electronic, display flush with the panel
Doors:	Reversible and self-closing with anti-odour system
Door gasket:	Magnetic, triple chamber and easily replaceable
Core probe:	Needle probe with 1 reading point
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	In PVC
Racks and slides:	Stainless steel AISI 304, quick release
Feets:	AISI 304 stainless steel, h 18 mm

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.

## COSMO - wi-fi control

Connection to Cosmo is not available for this blast chiller model.

## Technical draw

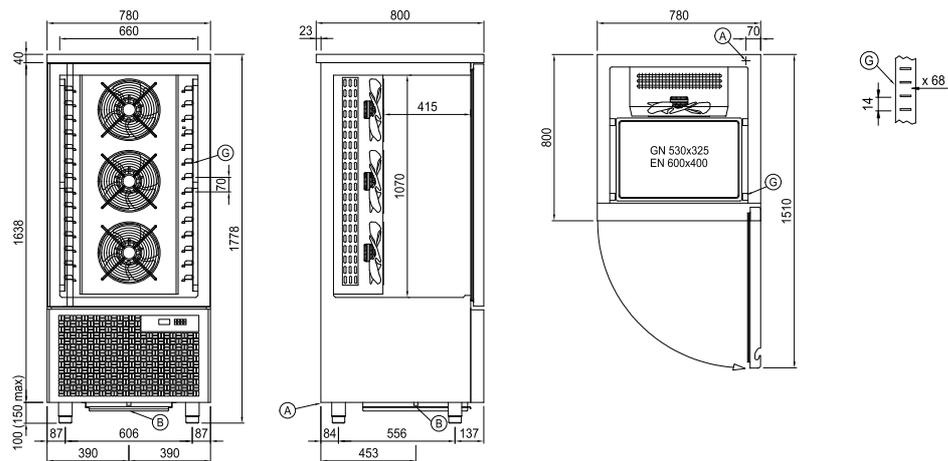

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch