

Client _____ Quantity _____
Project _____ Position _____

Master Fish Combi 1400 cabinet

Model: A140/2MPR **Cod:** A14141230201



Master Fish Combi 700 refrigerated cabinet, 3 doors, 2 separate compartments with 2 operating temperatures. Remote refrigeration unit, 5 heavy duty climatic class and R452a refrigerant gas. Equipment: 3 GN2/1 plastic coated shelves and 6 GN1/1 ABS fish pans with false bottom, lock with key, led lighting. Temperature range compartment A: -2°+8°C; Compartment B: -6°+4°C; ventilated refrigeration. Anti-corrosion treated evaporator, Electric defrost. 75 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. One-piece structure, interior/exterior AISI 304 stainless steel; outside back, external base and inside technical compartment in galvanised/colaminated steel. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Predisposed for connection to Cosmo remote supervision system and ModBus/RTU Rs485 connection.

Technical data

| | |
|----------------------------|---------------------------------|
| Gross capacity: | 1203 lt |
| Temperature range: | -2°+8°C/-6°+4°C |
| Refrigerant unit: | remote |
| Cooling gas: | R452a |
| Defrost: | Electric |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 1480×815×2085 mm |
| Packing dimensions: | 1575×930×2144 mm |
| Gross weight: | 220 Kg |
| Voltage: | 220-240 V - 50-60 Hz |
| Total rate: | 1420 W |
| Absorbed Current: | 6,5 A |
| Cooling capacity: | 448 W* |
| Cooling capacity 2: | 448 W* |
| *: | Evap. -10°C Cond. +55°C |

Features

| | |
|-------------------------------------|--|
| Standard equipment: | 6 slides for GN2/1 shelves, 3 plastic coated GN2/1 shelves, 6 abs GN1/1 pans, lock with key, LED lighting, water drain |
| Control: | Electronic, display flush with the panel |
| Doors: | 2 doors, self-closing with a 105° stop, right hinged |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 75 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |


Accessories and variants

Alimentazione frequenza 60Hz
 Other special voltage
 Half doors (4 doors)
 Frame for fixed masonry plinth
 RAL customisable colouring
 Master Marine solutions
 Predisposition for connection to CO2 remote control unit
 Remote condensing unit EMT6165GK
 4 Swivel and brake castors h 128 mm
 Stainless steel shelf GN2/1
 Plastic coated shelf GN2/1
 Pair of type C slides 605 mm
 Stainless steel drawer, h 150 mm 700/1400
 Bottles shelf, stainless steel coating for shelf 700/1400
 Serial interface, RS485 cable
 Cosmo cable connection kit
 ABS fish pan GN1/1 with perforated false bottom 2 pieces
 R134a valve

COSMO - wi-fi control

Cosmo è la tecnologia wifi che permette di connettere e monitorare da smartphone gli apparecchi Coldline. L'armadio, collegato con kit Cosmo ad un Cosmo hub (MODI, VISION o LEVTRONIC) o con Cosmo box wifi, può essere monitorato dalla CosmoApp per ricevere alert in caso di funzionamento anomalo.

Technical draw

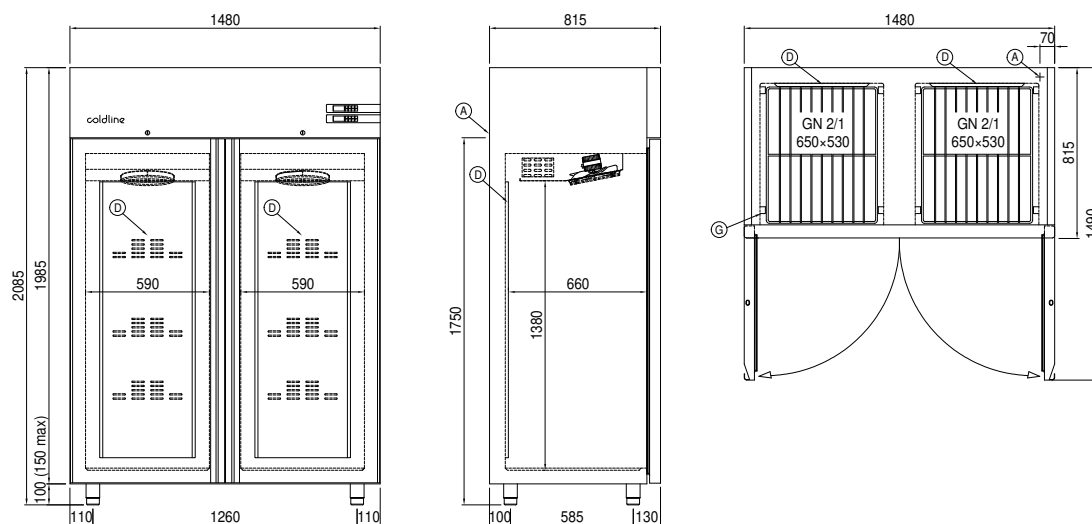

A: Power supply cable outlet

D: Airflow conveyor

G: Racks pitch

J: Automatic evaporation of condensing water

P: Water drain

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.