

Client _____ Quantity _____
Project _____ Position _____

Levtronic 700 cabinet

Model: A70/1FH

Cod: A32070800101



Technical data

| | |
|--------------------------|---------------------------------|
| Max capacity: | 34 trays E |
| Gross capacity: | 601 lt |
| Temperature range: | -6°+40°C |
| Ventilation range: | 25% - 100% |
| Humidity range: | 45% - 95% with humidifier |
| Humidifier: | Including |
| Refrigerant unit: | Plug-in |
| Energetic class: | D |
| Energy efficiency index: | 66,4 |
| Annual consumption: | 746 kW/h annum |
| 24h consumption: | 2,043 kW/h/24h |
| Climate class: | 5 |
| Cooling gas: | R290 (GWP=3) |
| Refrigerant Charge: | 120 g |
| Defrost: | Hot gas |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 740×815×2085 mm |
| Packing dimensions: | 835×930×2138 mm |
| Net / gross weight: | 155 Kg / 165 Kg |
| Net / gross volume: | 313 lt / 601 lt |
| Voltage: | 220-240 V - 50 Hz |
| Total rate: | 1360W - 6,2A |
| Cooling capacity: | 668 W* |
| *: | Evap. -10°C Cond. +55°C |

Features

| | |
|------------------------------|--|
| Functions: | Manual proving, retarder prover, continuous cycle, storage |
| Standard equipment: | 20 slides for EN60x40 trays, lock with key, water drain, LED lighting |
| Control: | 4,3" touch screen display with USB port |
| Doors: | 1 door, self-closing with a 105° stop, right hinged |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 75 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Wi-Fi remote control system |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.


Accessories and variants

| | |
|------------------------------|--|
| RAL customisable colouring | Purity C Quell ST 50 filter cartridge |
| Stainless steel evaporator | Aluminium coated backingan EN60x40 h 20 mm |
| Alimentazione frequenza 60Hz | Stainless steel shelf EN60x40 |
| Other special voltage | Plastic coated shelf EN60x40 |
| Foot pedal kit | Pair of type L slides 605 mm |

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Levtronic retarder provers to be connected, updated and monitored from smartphones. Levtronic is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

Technical draw

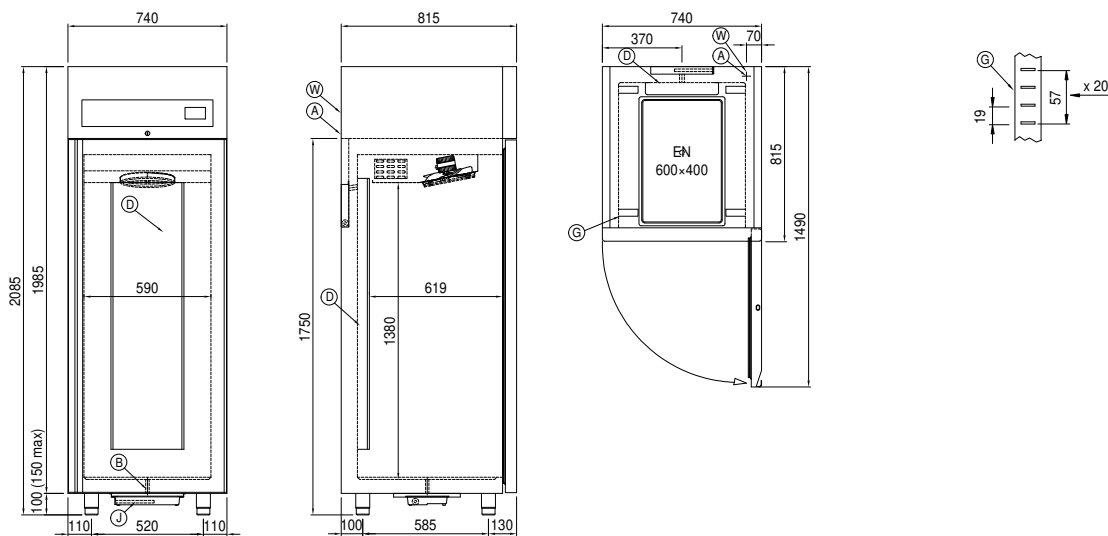

| | | | | | |
|----|---------------------------|----|---|----|---|
| A: | Power supply cable outlet | B: | Condensation water drain | D: | Airflow conveyor |
| G: | Racks pitch | J: | Automatic evaporation of condensing water | W: | Water mains connection for humidifier - 3/4" female. Unloading not required |