

Client	Quantity
Project	Position

Levtronic 900 cabinet

Model: A90/1FHV Cod: A32090800601



Technical data

Max capacity:	34 trays E
Gross capacity:	872 lt
Temperature range:	-6°+40°C
Ventilation range:	25% - 100%
Humidity range:	45% - 95% with humidifier
Humidifier:	Including
Refrigerant unit:	Plug-in
Energetic class:	E
Energy efficiency index:	84,7
Annual consumption:	1387 kW/h annum
24h consumption:	3,8 kW/h/24h
Climate class:	4
Cooling gas:	R290 (GWP=3)
Refrigerant Charge:	120 g
Defrost:	Hot gas
Valve:	Supplied standard with solenoid
Dimensions:	810×1015×2085 mm
Packing dimensions:	905×1130×2140 mm
Net / gross weight:	190 Kg / 200 Kg
Net / gross volume:	626 lt / 872 lt
Voltage:	220-240 V - 50 Hz
Total rate:	1360W - 6,2A
Cooling capacity:	668 W*
*:	Evap10°C Cond. +55°C

Features

Functions:	Manual proving, retarder prover, continuous cycle, storage
Standard equipment:	20 slides for EN60x80 trays, lock with key, LED lighting, water drain
Control:	4,3" touch screen display with USB port
Doors:	1 aluminium door, self-closing with 105° latch, right-hand hinges
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	75 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	AISI 304 stainless steel adjustable h 100/150 mm
Cosmo:	Wi-Fi remote control system

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



Accessories and variants


RAL customisable colouring
Stainless steel evaporator
Alimentazione frequenza 60Hz
Other special voltage
Foot pedal kit

Purity C Quell ST 50 filter cartridge
Aluminium coated backingan EN60x40 h 20 mm
Stainless steel shelf EN60x40
Plastic coated shelf EN60x40
Pair of type L slides 755 mm EN60x80

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Levtronic retarder provers to be connected, updated and monitored from smartphones. Levtronic is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

Technical draw

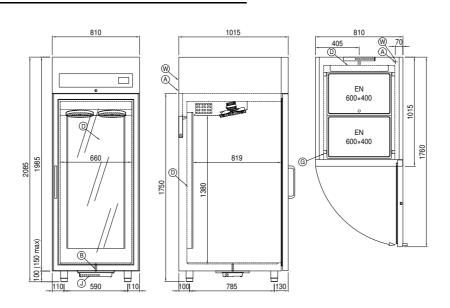



- A: Power supply cable outlet
- B: Condensation water drain
- D: Airflow conveyor

G: Racks pitch

- J: Automatic evaporation of condensing water
- W: Water mains connection for humidifier 3/4" female. Unloading not required

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.