

Client _____ Quantity _____
Project _____ Position _____

Saladette GN counter 3 doors

Model: TP17/1MD-710 **Cod:** T10301000211

Saladette refrigerated counter 3 doors, counter body height 710 mm, with top. Plug-in refrigeration unit, 5 heavy duty climatic class and R290 ecological refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Equipment: 1 GN1/1 plastic coated shelf. Each compartment can be configured with 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3 drawers. Anti-corrosion treated evaporator and hot gas defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.



Technical data

Top:	With top
Gross capacity:	440 lt
Temperature range:	-2°+8°C
Refrigerant unit:	Plug-in
Cooling gas:	R290
Defrost:	Hot gas
Body height:	710 mm
Valve:	Supplied standard with solenoid
Dimensions:	1780×700×850 mm
Packing dimensions:	1875×800×998 mm
Gross weight:	145 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	250 W
Absorbed Current:	1,15 A
Cooling capacity:	406 W*
*:	Evap. -10°C Cond. +55°C

Features

Standard equipment:	3 slides, 3 plastic coated GN1/1 shelves
Control:	Electronic, display flush with the panel
Doors:	3 doors, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	AISI 304 stainless steel adjustable h 100/150 mm
Cosmo:	Predisposed for Cosmo Hub connection

Accessories and variants

Drawers 1/2

Drawers 1/3

Drawers 1/3 + 2/3

Special counter body heights 650 mm

Special counter body heights 700 mm

Special counter body heights 750 mm

Technical compartment on the left

Lock with key for drawer 1/2

Lock with key for drawer 1/3

Lock with key for drawer 1/3 + 2/3

LED lighting

RAL customisable colouring

Plug-in water unit

Stainless steel evaporator

Saladette lid, customised dimensions

Saladette internal basin, customised dimensions

Internal hygiene H3

Granite worktop with splashback

Granite flat worktop

Adjustable feet h 145/195 mm

4 Swivel and brake castors h 128 mm

Brackets for GN pans for drawer

GN1/2 container + lids kit for drawer, h 150 mm

GN1/3 container + lids kit for drawer, h 150 mm

Stainless steel shelf GN1/1

Plastic coated shelf GN1/1

Pair of type C slides 505 mm

Serial interface, RS485 cable

Cosmo cable connection kit

IP44 schuko socket with cover

Saladette pans kit, 3 doors

Saladette lid, standard dimensions 3D

Saladette internal basin, standard dimensions 3D

Removable plinth GN 3D h 50 mm


Removable plinth GN 3D h 100 mm

Removable plinth GN 3D h 150 mm

COSMO - wi-fi control

Cosmo è la tecnologia wifi che permette di connettere e monitorare da smartphone gli apparecchi Coldline. Il template collegato con kit Cosmo ed un

Technical draw

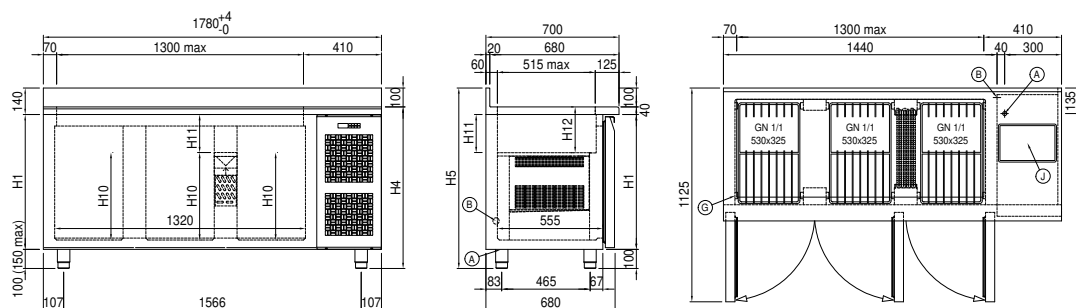

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

J: Automatic evaporation of condensing water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.