

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
 Project \_\_\_\_\_ Position \_\_\_\_\_

## Pizza Base EN60x40 counter 2 doors

**Model:** TZS13/1MR-710

**Cod:** T40210000201

Pizza refrigerated base 2 doors, counter body height 710 mm, without top. Remote refrigeration unit, 5 heavy duty climatic class and R452a refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Equipment: 8 pairs of slides for EN60x40 trays. Each compartment can be configured with refrigerated and neutral drawers. Anti-corrosion treated evaporator and electric defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.



### Technical data

|                            |                                 |
|----------------------------|---------------------------------|
| <b>Top:</b>                | Without top                     |
| <b>Gross capacity:</b>     | 389 lt                          |
| <b>Temperature range:</b>  | -2°+8°C                         |
| <b>Refrigerant unit:</b>   | remote                          |
| <b>Cooling gas:</b>        | R452a                           |
| <b>Defrost:</b>            | Electric                        |
| <b>Body height:</b>        | 710 mm                          |
| <b>Valve:</b>              | Supplied standard with solenoid |
| <b>Dimensions:</b>         | 1240×780×810 mm                 |
| <b>Packing dimensions:</b> | 1545×900×998 mm                 |
| <b>Gross weight:</b>       | 100 Kg                          |
| <b>Voltage:</b>            | 220-240 V - 50-60 Hz            |
| <b>Total rate:</b>         | 810 W                           |
| <b>Absorbed Current:</b>   | 3,7 A                           |
| <b>Cooling capacity:</b>   | 519 W*                          |

### Features

|                                     |  |
|-------------------------------------|--|
| <b>Standard equipment:</b>          | 8 slides EN60x40                                       |
| <b>Control:</b>                     | Electronic, display flush with the panel               |
| <b>Doors:</b>                       | 2 doors, self-closing, reversible with 105° stop       |
| <b>Door gasket:</b>                 | Magnetic, triple chamber and easily replaceable        |
| <b>Insulation:</b>                  | 60 mm thickness - CFC/HCFC free                        |
| <b>Exterior/interior finishing:</b> | Exterior and interior AISI 304 stainless steel.        |
| <b>Inner corners:</b>               | Rounded for easy cleaning and ensuring maximum hygiene |
| <b>Handle:</b>                      | Stainless steel AISI 304, 2 mm thick                   |
| <b>Racks and slides:</b>            | Stainless steel AISI 304                               |
| <b>Feets:</b>                       | AISI 304 stainless steel adjustable h 100/150 mm       |
| <b>Cosmo:</b>                       | Predisposed for Cosmo Hub connection                   |

## Accessories and variants

|  |   |
|--|---|
| Drawers 1/2  | 1+1 Neutral drawers h 710 mm                |
| Drawers 1/3  | Adjustable feet h 145/195 mm                |
| Drawers 1/3 + 2/3  | 4 Swivel and brake castors h 128 mm         |
| Lock with key for drawer 1/2                             | Frame fitted with telescopic EN60x40 slides |
| Lock with key for drawer 1/3                             | EN60x40 Pizza container h 60 mm             |
| Lock with key for drawer 1/3 + 2/3                       | Aluminium coated backingan EN60x40 h 20 mm  |
| Predisposition for connection to CO2 remote control unit | Pair of type L slides 605 mm                |
| Alimentazione frequenza 60Hz                             | Serial interface, RS485 cable               |
| Other special voltage                                    | Cosmo cable connection kit                  |
| Remote condensing unit EMT6165GK                         | Cosmo wifi connection kit                   |
| 7 Neutral drawers h 710 mm                               | Removable plinth EN 2DR h 100 mm            |
| 3+1 Neutral drawers h 710 mm                             | Removable plinth EN 2DR h 150 mm            |


## Remote unit technical data

|                            |                         |
|----------------------------|-------------------------|
| <b>Voltage:</b>            | 220-240 V - 50 Hz       |
| <b>Cooling gas:</b>        | R452A                   |
| <b>Gross weight:</b>       | 17 Kg                   |
| <b>Dimensions:</b>         | 450x300x270             |
| <b>Packing dimensions:</b> | 470x330x300 mm          |
| <b>Cooling capacity:</b>   | Evap. -10°C Cond. +55°C |

### COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive wi-fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, Levtronic, QUBI) or with Cosmo wi-fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

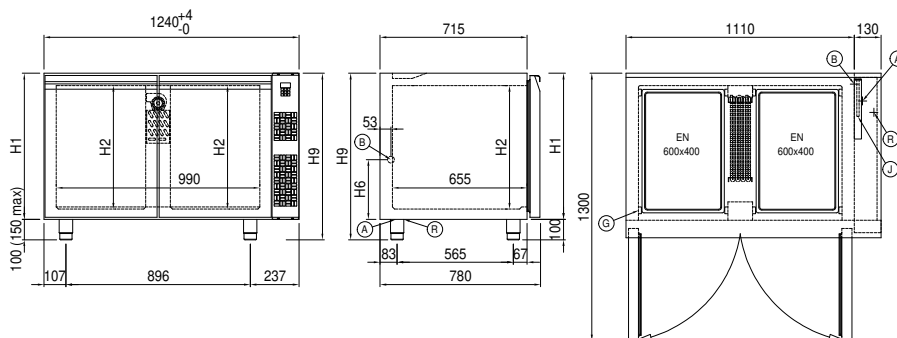

|           |   |           |                          |           |             |
|-----------|---|-----------|--------------------------|-----------|-------------|
| <b>A:</b> | Power supply cable outlet                 | <b>B:</b> | Condensation water drain | <b>G:</b> | Racks pitch |
| <b>J:</b> | Automatic evaporation of condensing water | <b>R:</b> | Gas output pipes         |           |             |