Client _____ Quantity _____

Project _____ Position _____

# Pizza Base EN60x40 counter 3 doors

**Model:** TZS17/1M-710 **Cod:** T40300000201

Pizza refrigerated base 3 doors, counter body height 710 mm, without top. Plug-in refrigeration unit, B energetic class, 5 heavy duty climatic class and R290 ecological refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Equipment: 12 pairs of slides for EN60x40 trays. Each compartment can be configured with refrigerated and neutral drawers. Anti-corrosion treated evaporator and hot gas defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.



## Technical data

| | |
|---|---|
| **Top:** | Without top |
| **Gross capacity:** | 607 lt |
| **Temperature range:** | -2°+8°C |
| **Refrigerant unit:** | Plug-in |
| **Energetic class:** | B |
| **Energy efficiency index:** | 31 |
| **Annual consumption:** | 858 kW/h annum |
| **24h consumption:** | 2,351 kW/h/24h |
| **Climate class:** | 5 |
| **Cooling gas:** | R290 (GWP=3) |
| **Refrigerant Charge:** | 110g |
| **Defrost:** | Hot gas |
| **Body height:** | 710 mm |
| **Valve:** | Supplied standard with solenoid |
| **Dimensions:** | 2005×780×810 mm |
| **Packing dimensions:** | 2100×900×1010 mm |
| **Net / gross weight:** | 145 Kg / 155 Kg |
| **Net / gross volume:** | 382 lt / 607 lt |
| **Voltage:** | 220-240 V - 50 Hz |
| **Total rate:** | 250W - 1,15A |
| **Cooling capacity:** | 406 W* |
| *: | Evap. -10°C Cond. +55°C |

## Features

| | |
|---|---|
| **Standard equipment:** | 12 slides EN60x40 |
| **Control:** | Electronic, display flush with the panel |
| **Doors:** | 3 doors, self-closing, reversible with 105° stop |
| **Door gasket:** | Magnetic, triple chamber and easily replaceable |
| **Insulation:** | 60 mm thickness - CFC/HCFC free |
| **Exterior/interior finishing:** | Exterior and interior AISI 304 stainless steel. |
| **Inner corners:** | Rounded for easy cleaning and ensuring maximum hygiene |
| **Handle:** | Stainless steel AISI 304, 2 mm thick |
| **Racks and slides:** | Stainless steel AISI 304 |
| **Feets:** | AISI 304 stainless steel adjustable h 100/150 mm |
| **Cosmo:** | Predisposed for Cosmo Hub connection |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.


## Accessories and variants

| | |
|---|---|
| Drawers 1/2 | Granite top 2005 mm |
| Drawers 1/3 | Adjustable feet h 145/195 mm |
| Drawers 1/3 + 2/3 | 6 Swivel and brake castors h 128 mm |
| Lock with key for drawer 1/2 | Frame fitted with telescopic EN60x40 slides |
| Lock with key for drawer 1/3 | EN60x40 Pizza container h 60 mm |
| Lock with key for drawer 1/3 + 2/3 | Aluminium coated backingan EN60x40 h 20 mm |
| Plug-in water unit | Pair of type L slides 605 mm |
| Alimentazione frequenza 60Hz | Serial interface, RS485 cable |
| Other special voltage | Cosmo cable connection kit |
| 7 Neutral drawers h 710 mm | Cosmo wifi connection kit |
| 3+1 Neutral drawers h 710 mm | IP44 schuko socket with cover |
| 1+1 Neutral drawers h 710 mm | Removable plinth EN 3D h 100 mm |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

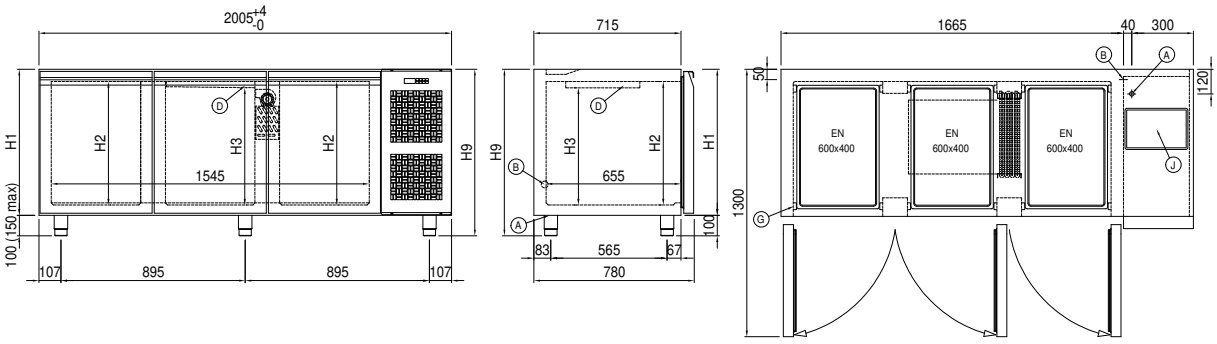


**A:** Power supply cable outlet

**B:** Condensation water drain

**D:** Airflow conveyor

**G:** Racks pitch

**J:** Automatic evaporation of condensing water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.