

Client _____ Quantity _____

Project _____ Position _____

Master 650 cabinet

Model: A80/1MUR

Cod: A14081200101



Technical data

| | |
|---------------------|---------------------------------|
| Gross capacity: | 573 lt |
| Temperature range: | -2°+8°C |
| Refrigerant unit: | remote |
| Cooling gas: | R452a (GWP=2.141) |
| Defrost: | Electric |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 810×715×2085 mm |
| Packing dimensions: | 905×830×2138 mm |
| Net / gross weight: | 115 Kg / 135 Kg |
| Net / gross volume: | 450 lt / 573 lt |
| Voltage: | 220-240 V - 50-60 Hz |
| Total rate: | 850W - 3,9A |
| Cooling capacity: | 668 W* |
| *: | Evap. -10°C Cond. +55°C |

Features

| | |
|------------------------------|--|
| Standard equipment: | 3 slides for GN2/1 shelves, 3 plastic coated GN2/1 shelves, lock with key, LED lighting |
| Control: | Electronic, display flush with the panel |
| Doors: | 1 door, self-closing with a 105° stop, right hinged |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 75 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Predisposed for Cosmo Hub connection |

Accessories and variants

| | |
|--|-------------------------------------|
| Alimentazione frequenza 60Hz | 4 Swivel and brake castors h 128 mm |
| Other special voltage | Pair of type C slides 505 mm |
| Half doors | Stainless steel shelf GN2/1 |
| Frame for fixed masonry plinth | Plastic coated shelf GN2/1 |
| RAL customisable colouring | Pair of type C slides 605 mm |
| Master Marine solutions | Serial interface, RS485 cable |
| Predisposition for connection to CO2 remote control unit | Cosmo cable connection kit |
| Remote condensing unit NEK6210GK | Cosmo wifi connection kit |
| Foot pedal kit | R134a valve |


Remote unit technical data

| | |
|----------------------------|-------------------------|
| Voltage: | 220-240 V - 50 Hz |
| Assorbimento Unità Remota: | 500W - 2,3A |
| Cooling gas: | R452A |
| Gross weight: | 16 Kg |
| Dimensions: | 480×330×295 mm |
| Pipe delivery: | Ø 1/4" |
| Pipe suction: | Ø 3/8" |
| Packing dimensions: | 540×345×310 mm |
| Cooling capacity: | Evap. -10°C Cond. +55°C |

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The cabinet, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

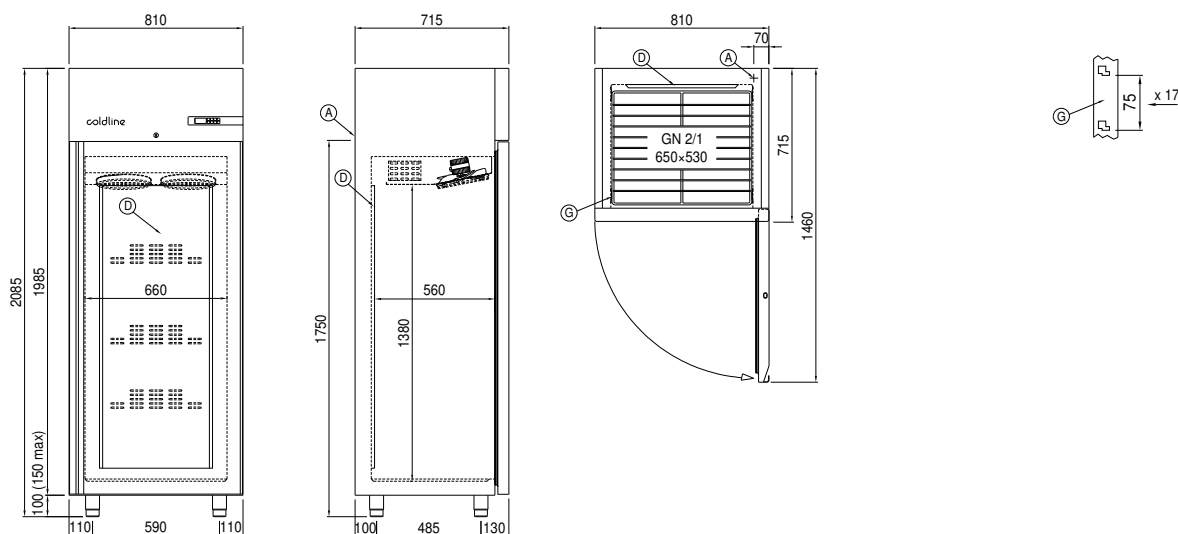

A: Power supply cable outlet

D: Airflow conveyor

G: Racks pitch

J: Automatic evaporation of condensing water