

Client _____ Quantity _____

Project _____ Position _____

Ice 650 cabinet

Model: A80/1TG

Cod: A52080700101



Technical data

Gross capacity:	573 lt
Temperature range:	-10°-30°C
Refrigerant unit:	Plug-in
Energetic class:	E
Energy efficiency index:	81,8
Annual consumption:	2467 kW/h annum
24h consumption:	6,759 kW/h/24h
Climate class:	5
Cooling gas:	R290 (GWP=3)
Refrigerant Charge:	120 g
Defrost:	Hot gas
Valve:	Supplied standard with solenoid
Dimensions:	810×715×2085 mm
Packing dimensions:	835×930×2138 mm
Net / gross weight:	140 Kg / 150 Kg
Net / gross volume:	313 lt / 573 lt
Voltage:	220-240 V - 50 Hz
Total rate:	1180W - 6,2A
Cooling capacity:	751 W*
*:	Evap. -30°C Cond. +55°C

Features

Standard equipment:	8 slides for EN60x40 shelves, 8 plastic coated EN60x40 shelves, lock with key, LED lighting
Control:	Electronic, display flush with the panel
Doors:	1 door, self-closing with a 105° stop, right hinged
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	75 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	AISI 304 stainless steel adjustable h 100/150 mm
Cosmo:	Predisposed for Cosmo Hub connection

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.


Accessories and variants

Half doors	4 Swivel and brake castors h 128 mm
RAL customisable colouring	Stainless steel shelf EN60x40
Plug-in water unit	Plastic coated shelf EN60x40
Alimentazione frequenza 60Hz	Pair of type L slides 398 mm EN
Other special voltage	Serial interface, RS485 cable
Foot pedal kit	Cosmo cable connection kit

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The cabinet, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

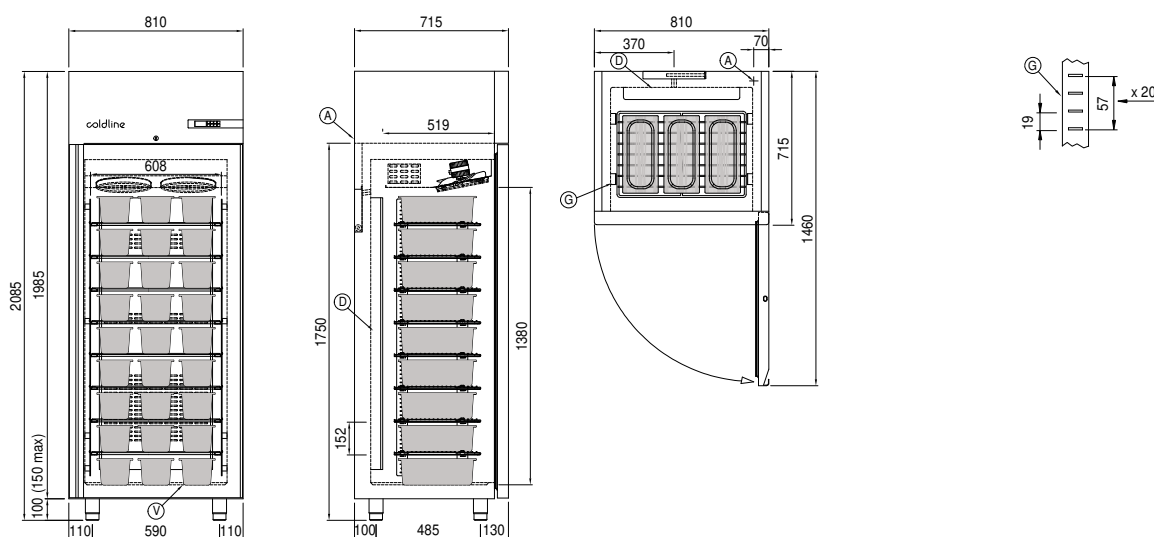

- A: Power supply cable outlet D: Airflow conveyor G: Racks pitch
- V: Basins 360x165x120h (not included)