

Client _____ Quantity _____

Project _____ Position _____

Ice 650 cabinet

Model: A80/1BGR

Cod: A52081500101



Technical data

| | |
|---------------------|---------------------------------|
| Gross capacity: | 573 lt |
| Temperature range: | -10°-22°C |
| Refrigerant unit: | remote |
| Cooling gas: | R452a (GWP=2.141) |
| Defrost: | Electric |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 810×715×2085 mm |
| Packing dimensions: | 835×930×2138 mm |
| Net / gross weight: | 130 Kg / 140 Kg |
| Net / gross volume: | 313 lt / 573 lt |
| Voltage: | 220-240 V - 50-60 Hz |
| Total rate: | 1010W - 4,6A |
| Cooling capacity: | 646 W* |
| *: | Evap. -30°C Cond. +55°C |

Features

| | |
|------------------------------|--|
| Standard equipment: | 8 slides for EN60x40 shelves, 8 plastic coated EN60x40 shelves, lock with key, LED lighting |
| Control: | Electronic, display flush with the panel |
| Doors: | 1 door, self-closing with a 105° stop, right hinged |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 75 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Predisposed for Cosmo Hub connection |

Accessories and variants

| | |
|--|-------------------------------------|
| Half doors | 4 Swivel and brake castors h 128 mm |
| RAL customisable colouring | Stainless steel shelf EN60x40 |
| Predisposition for connection to CO2 remote control unit | Plastic coated shelf EN60x40 |
| Alimentazione frequenza 60Hz | Pair of type L slides 398 mm EN |
| Other special voltage | Serial interface, RS485 cable |
| Remote condensing unit NT2180GK | Cosmo cable connection kit |
| Foot pedal kit | Cosmo wifi connection kit |


Remote unit technical data

| | |
|----------------------------|-------------------------|
| Voltage: | 220-240 V - 50 Hz |
| Assorbimento Unità Remota: | 840W - 3,8A |
| Cooling gas: | R452A |
| Gross weight: | 30,2 Kg |
| Dimensions: | 500×330×295 mm |
| Pipe delivery: | Ø 3/8" |
| Pipe suction: | Ø 3/8" |
| Packing dimensions: | 540×345×310 mm |
| Cooling capacity: | Evap. -30°C Cond. +55°C |

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The cabinet, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

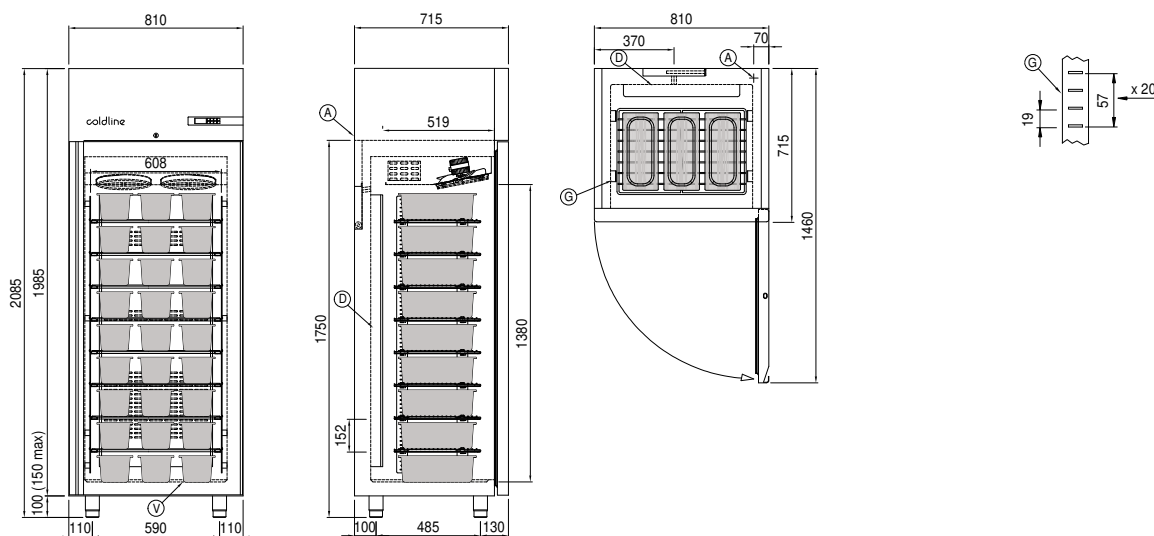

A: Power supply cable outlet D: Airflow conveyer G: Racks pitch

J: Automatic evaporation of condensing water V: Basins 360x165x120h (not included)