

Client _____ Quantity _____

Project _____ Position _____

Saladette GN counter 1 door

Model: TP09/1MD-710

Cod: T10101000211



Technical data

| | |
|---------------------|---------------------------------|
| Top: | With top |
| Gross capacity: | 120 lt |
| Temperature range: | -2°+8°C |
| Refrigerant unit: | Plug-in |
| Cooling gas: | R290 (GWP=3) |
| Refrigerant Charge: | 90g |
| Defrost: | Hot gas |
| Body height: | 710 mm |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 820×700×850 mm |
| Packing dimensions: | 915×800×998 mm |
| Net / gross weight: | 75 Kg / 85 Kg |
| Net / gross volume: | / 120 lt |
| Voltage: | 220-240 V - 50 Hz |
| Total rate: | 250W - 1,15A |
| Cooling capacity: | 406 W* |
| *: | Evap. -10°C Cond. +55°C |

Features

| | |
|------------------------------|--|
| Standard equipment: | 1 slide, 1 plastic coated GN1/1 shelf |
| Control: | Electronic, display flush with the panel |
| Doors: | 1 door, self-closing, reversible with 105° stop |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 60 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Predisposed for Cosmo Hub connection |


Accessories and variants

| | |
|---|--|
| Drawers 1/2 | Granite flat worktop |
| Drawers 1/3 | Adjustable feet h 145/195 mm |
| Drawers 1/3 + 2/3 | 4 Swivel and brake castors h 128 mm |
| Special counter body heights 650 mm | Brackets for GN pans for drawer |
| Special counter body heights 700 mm | GN1/2 container + lids kit for drawer, h 150 mm |
| Special counter body heights 750 mm | GN1/3 container + lids kit for drawer, h 150 mm |
| Technical compartment on the left | Stainless steel shelf GN1/1 |
| Lock with key for drawer 1/2 | Plastic coated shelf GN1/1 |
| Lock with key for drawer 1/3 | Pair of type C slides 505 mm |
| Lock with key for drawer 1/3 + 2/3 | Serial interface, RS485 cable |
| LED lighting | Cosmo cable connection kit |
| RAL customisable colouring | Cosmo wifi connection kit |
| Plug-in water unit | IP44 schuko socket with cover |
| Stainless steel evaporator | Saladette pans kit, 1 door |
| Saladette lid, customised dimensions | Saladette lid, standard dimensions 1D |
| Saladette internal basin, customised dimensions | Saladette internal basin, standard dimensions 1D |
| Internal hygiene H3 | Removable plinth GN 1D h 100 mm |
| Granite worktop with splashback | Removable plinth GN 1D h 150 mm |

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

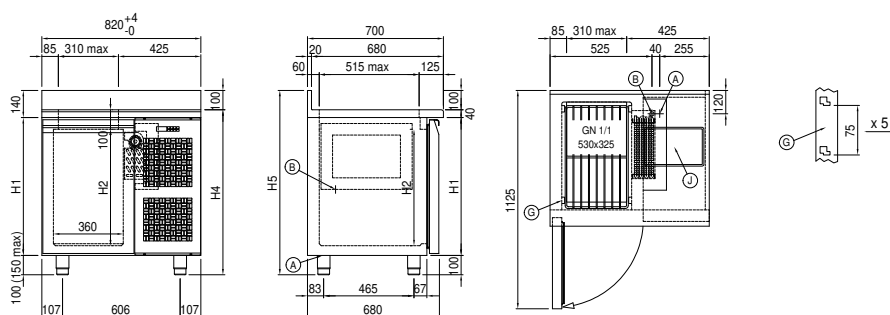

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

J: Automatic evaporation of condensing water