

Client _____ Quantity _____
 Project _____ Position _____

Saladette GN counter 1 door

Model: TS09/1MDR-660

Cod: T10110000213

Saladette refrigerated counter 1 door, counter body height 660 mm, without top. Remote refrigeration unit, 5 heavy duty climatic class and R452a refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Equipment: 1 GN1/1 plastic coated shelf. Each compartment can be configured with 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3 drawers. Anti-corrosion treated evaporator and electric defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.



Technical data

| | |
|---------------------|---------------------------------|
| Top: | Without top |
| Gross capacity: | 110 lt |
| Temperature range: | -2°+8°C |
| Refrigerant unit: | remote |
| Cooling gas: | R452a (GWP=2.141) |
| Defrost: | Electric |
| Body height: | 660 mm |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 680×680×760 mm |
| Packing dimensions: | 915×800×998 mm |
| Net / gross weight: | 37 Kg / 47 Kg |
| Net / gross volume: | ND / 110 lt |
| Voltage: | 220-240 V - 50-60 Hz |
| Total rate: | 710W - 3,2A |
| Cooling capacity: | 368 W* |
| *: | Evap. -10°C Cond. +55°C |

Features

| | |
|------------------------------|--|
| Standard equipment: | 1 slide, 1 plastic coated GN1/1 shelf |
| Control: | Electronic, display flush with the panel |
| Doors: | 1 door, self-closing, reversible with 105° stop |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 60 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Predisposed for Cosmo Hub connection |

Accessories and variants

| | |
|--|--|
| Drawers 1/2 | Granite worktop with splashback |
| Drawers 1/3 | Granite flat worktop |
| Drawers 1/3 + 2/3 | Remote condensing unit EMT6144GK |
| Special counter body heights 650 mm | Adjustable feet h 145/195 mm |
| Special counter body heights 700 mm | Brackets for GN pans for drawer |
| Special counter body heights 750 mm | GN1/2 container + lids kit for drawer, h 150 mm |
| Technical compartment on the left | GN1/3 container + lids kit for drawer, h 150 mm |
| Common technical compartment | Stainless steel shelf GN1/1 |
| Counters without a technical compartment | Plastic coated shelf GN1/1 |
| Lock with key for drawer 1/2 | Pair of type C slides 505 mm |
| Lock with key for drawer 1/3 | Serial interface, RS485 cable |
| Lock with key for drawer 1/3 + 2/3 | Cosmo cable connection kit |
| LED lighting | Cosmo wifi connection kit |
| RAL customisable colouring | R134a valve |
| Stainless steel evaporator | Saladette pans kit, 1 door |
| Predisposition for connection to CO2 remote control unit | Saladette lid, standard dimensions 1D |
| Saladette lid, customised dimensions | Saladette internal basin, standard dimensions 1D |
| Saladette internal basin, customised dimensions | Removable plinth GN 1DR h 100 mm |
| Internal hygiene H3 | Removable plinth GN 1DR h 150 mm |


Remote unit technical data

| | |
|----------------------------|-------------------------|
| Voltage: | 220-240 V - 50 Hz |
| Assorbimento Unità Remota: | 250W - 1,1A |
| Cooling gas: | R404-R452 |
| Gross weight: | 17 Kg |
| Dimensions: | 450×300×270 mm |
| Pipe delivery: | Ø 1/4" |
| Pipe suction: | Ø 3/8" |
| Packing dimensions: | 470×330×300 mm |
| Cooling capacity: | Evap. -10°C Cond. +55°C |

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive wi-fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, Levtronic, QUBI) or with Cosmo wi-fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

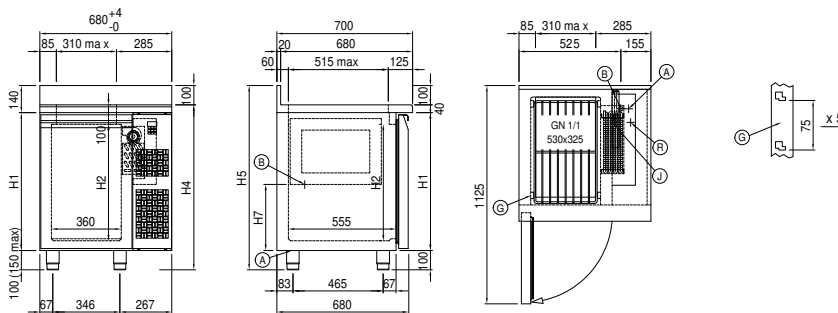

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

J: Automatic evaporation of condensing water

R: Gas output pipes

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.