Client _____ Quantity _____

Project _____ Position _____

# Master GN counter 4 doors

**Model:** TA21/1MR-660 **Cod:** T10412000203

Master refrigerated counter 4 doors, counter body height 660 mm, top with splashback. Remote refrigeration unit, 5 heavy duty climatic class and R452a refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Equipment: 1 GN1/1 plastic coated shelf. Each compartment can be configured with 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3 drawers. Anti-corrosion treated evaporator and electric defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.




## Technical data

| | |
|---|---|
| **Top:** | With top and splashback |
| **Gross capacity:** | 549 lt |
| **Temperature range:** | -2°+8°C |
| **Refrigerant unit:** | remote |
| **Cooling gas:** | R452a (GWP=2.141) |
| **Defrost:** | Electric |
| **Body height:** | 660 mm |
| **Valve:** | Supplied standard with solenoid |
| **Dimensions:** | 2050×700×900 mm |
| **Packing dimensions:** | 2355×800×998 mm |
| **Net / gross weight:** | 163 Kg / 173 Kg |
| **Net / gross volume:** | 331 lt / 549 lt |
| **Voltage:** | 220-240 V - 50-60 Hz |
| **Total rate:** | 810W - 3,7A |
| **Cooling capacity:** | 668 W* |
| *: | Evap. -10°C Cond. +55°C |

## Features

| | |
|---|---|
| **Standard equipment:** | 4 slides, 4 plastic coated GN1/1 shelves |
| **Control:** | Electronic, display flush with the panel |
| **Doors:** | 4 doors, self-closing, reversible with 105° stop |
| **Door gasket:** | Magnetic, triple chamber and easily replaceable |
| **Insulation:** | 60 mm thickness - CFC/HCFC free |
| **Exterior/interior finishing:** | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel. |
| **Inner corners:** | Rounded for easy cleaning and ensuring maximum hygiene |
| **Handle:** | Stainless steel AISI 304, 2 mm thick |
| **Racks and slides:** | Stainless steel AISI 304 |
| **Feets:** | AISI 304 stainless steel adjustable h 100/150 mm |
| **Cosmo:** | Predisposed for Cosmo Hub connection |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

## Accessories and variants

| | |
|---|---|
| Drawers 1/2 | Internal hygiene H3 |
| Drawers 1/3 | Granite flat worktop |
| Drawers 1/3 + 2/3 | Granite worktop with splashback |
| Special counter body heights 650 mm | Remote condensing unit NEK6210GK |
| Special counter body heights 700 mm | Adjustable feet h 145/195 mm |
| Special counter body heights 750 mm | 6 Swivel and brake castors h 128 mm |
| Technical compartment on the left | Brackets for GN pans for drawer |
| Common technical compartment | GN1/2 container + lids kit for drawer, h 150 mm |
| Counters without a technical compartment | GN1/3 container + lids kit for drawer, h 150 mm |
| Lock with key for drawer 1/2 | Bottles shelf, stainless steel coating for shelf 350 |
| Lock with key for drawer 1/3 | Stainless steel shelf GN1/1 |
| Lock with key for drawer 1/3 + 2/3 | Plastic coated shelf GN1/1 |
| LED lighting | Pair of type C slides 505 mm |
| RAL customisable colouring | Serial interface, RS485 cable |
| Stainless steel evaporator | Cosmo cable connection kit |
| Predisposition for connection to CO2 remote control unit | Cosmo wifi connection kit |
| Alimentazione frequenza 60Hz | Removable plinth GN 4DR h 100 mm |
| Other special voltage | Removable plinth GN 4DR h 150 mm |


## Remote unit technical data

| | |
|---|---|
| **Voltage:** | 220-240 V - 50 Hz |
| **Unit total rate :** | 500W - 2,3A |
| **Cooling gas:** | R452A |
| **Gross weight:** | 16 Kg |
| **Dimensions:** | 480×330×295 mm |
| **Pipe delivery:** | Ø 1/4" |
| **Pipe suction:** | Ø 3/8" |
| **Packing dimensions:** | 540×345×310 mm |
| **Cooling capacity:** | Evap. -10°C Cond. +55°C |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

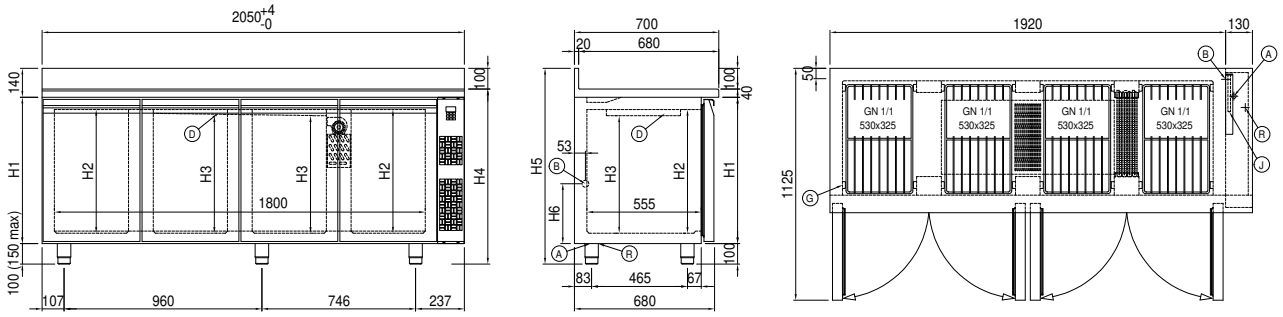


| | | | | | |
|---|---|---|---|---|---|
| **A:** | Power supply cable outlet | **B:** | Condensation water drain | **D:** | Airflow conveyor |
| **G:** | Racks pitch | **J:** | Automatic evaporation of condensing water | **R:** | Gas output pipes |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.