

Client _____ Quantity _____
Project _____ Position _____

Master 600 counter 3 doors

Model: TA17/1MQR-760 **Cod:** T12312000202



Technical data

Top:	With top and splashback
Gross capacity:	390 lt
Temperature range:	-2°+8°C
Refrigerant unit:	remote
Cooling gas:	R452a
Defrost:	Electric
Body height:	760 mm
Valve:	Supplied standard with solenoid
Dimensions (mm):	1570×600×1000 mm
Packing dimensions:	1875×800×998 mm
Gross weight:	149 Kg
Voltage:	220-240 V - 50-60 Hz
Total rate:	810 W
Absorbed Current:	3,7 A
Cooling capacity:	668 W*

Features

Standard equipment:	3 slides, 3 plastic coated 325x430 mm shelves
Control:	Electronic, display flush with the panel
Doors:	3 doors, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	AISI 304 stainless steel adjustable h 100/150 mm
Cosmo:	Predisposed for Cosmo Hub connection

Accessories and variants


- Drawers 1/2
- Drawers 1/3
- Drawers 1/3 + 2/3
- Special counter body heights 650 mm
- Special counter body heights 700 mm
- Special counter body heights 750 mm
- Technical compartment on the left
- Common technical compartment
- Counters without a technical compartment
- Lock with key for drawer 1/2
- Lock with key for drawer 1/3
- Lock with key for drawer 1/3 + 2/3
- Glass door
- LED lighting
- RAL customisable colouring
- Stainless steel evaporator
- Predisposition for connection to CO2 remote control unit
- Power supply frequency 60Hz

- Other special voltage
- Internal hygiene H3
- Granite flat worktop
- Granite worktop with splashback
- Remote condensing unit NEK6210GK
- Adjustable feet h 145/195 mm
- 4 Swivel and brake castors h 128 mm
- Brackets for GN pans for drawer
- GN1/2 container + lids kit for drawer, h 150 mm
- GN1/3 container + lids kit for drawer, h 150 mm
- Plastic coated shelf 325x430
- Pair of type C slides 405 mm
- Serial interface, RS485 cable
- Cosmo connection kit
- Removable plinth CQ 3DR h 50 mm
- Removable plinth CQ 3DR h 100 mm
- Removable plinth CQ 3DR h 150 mm
- R134a valve

Remote unit technical data

Voltage: 220-240 V - 50 Hz

Technical draw

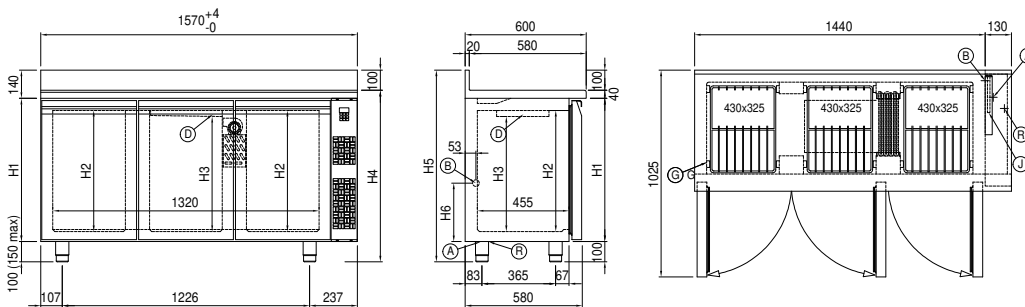

- | | | |
|-------------------------------------|-----------------------------------------------------|----------------------------|
| A: Power supply cable outlet | B: Condensation water drain | D: Airflow conveyor |
| G: Racks pitch | J: Automatic evaporation of condensing water | R: Gas output pipes |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.