Client _____ Quantity _____

Project _____ Position _____

# Prep-station EN60x40 counter 2 doors

**Model:** TVG13/1MZ-1/3-710 **Cod:** T20203000221

Prep-Station 800 refrigerated counter 2 doors, counter body height 710 mm, with Rosa Beta granite top. Plug-in refrigeration unit, 5 heavy duty climatic class and R290 ecological refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Refrigerated container for GN1/3 bowls with opening lid. Equipment: 2 EN60x40 plastic coated shelves. Each compartment can be configured with 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3 drawers. Anti-corrosion treated evaporator and hot gas defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.




## Technical data

| | |
|---|---|
| **Top:** | With top |
| **Gross capacity:** | 389 lt |
| **Temperature range:** | -2°+8°C |
| **Refrigerant unit:** | Plug-in |
| **Cooling gas:** | R290 (GWP=3) |
| **Refrigerant Charge:** | 110g |
| **Defrost:** | Hot gas |
| **Body height:** | 710 mm |
| **Valve:** | Supplied standard with solenoid |
| **Dimensions:** | 1450×800×1005 mm |
| **Packing dimensions:** | 1545×900×998 mm |
| **Net / gross weight:** | 170 Kg / 180 Kg |
| **Net / gross volume:** | / 389 lt |
| **Voltage:** | 220-240 V - 50 Hz |
| **Total rate:** | 250W - 1,15A |
| **Cooling capacity:** | 406 W* |
| *: | Evap. -10°C Cond. +55°C |

## Features

| | |
|---|---|
| **Standard equipment:** | 2 slides, 2 plastic coated EN60x40 shelves |
| **Control:** | Electronic, display flush with the panel |
| **Doors:** | 2 doors, self-closing, reversible with 105° stop |
| **Door gasket:** | Magnetic, triple chamber and easily replaceable |
| **Insulation:** | 60 mm thickness - CFC/HCFC free |
| **Exterior/interior finishing:** | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel. |
| **Inner corners:** | Rounded for easy cleaning and ensuring maximum hygiene |
| **Lid hinges:** | Made of black plastic |
| **Handle:** | Stainless steel AISI 304, 2 mm thick |
| **Racks and slides:** | Stainless steel AISI 304 |
| **Feets:** | AISI 304 stainless steel adjustable h 100/150 mm |
| **Cosmo:** | Predisposed for Cosmo Hub connection |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.


## Accessories and variants

| | |
|---|---|
| Drawers 1/2 | Adjustable feet h 145/195 mm |
| Drawers 1/3 | 4 Swivel and brake castors h 128 mm |
| Drawers 1/3 + 2/3 | EN drawer reduction kit for GN containers |
| Special counter body heights 700 mm | Brackets for GN pans for drawer |
| Special counter body heights 750 mm | GN1/2 container + lids kit for drawer, h 150 mm |
| Technical compartment on the left | GN1/3 container + lids kit for drawer, h 150 mm |
| Special size of technical compartment | Stainless steel shelf EN60x40 |
| Lock with key for drawer 1/2 | Plastic coated shelf EN60x40 |
| Lock with key for drawer 1/3 | Pair of type L slides 605 mm |
| Lock with key for drawer 1/3 + 2/3 | Serial interface, RS485 cable |
| LED lighting | Cosmo cable connection kit |
| RAL customisable colouring | Cosmo wifi connection kit |
| Plug-in water unit | IP44 schuko socket with cover |
| Alimentazione frequenza 60Hz | Prep-Station pans kit GN1/3 plug-in, 2D EN |
| Other special voltage | Removable plinth EN 2D h 100 mm |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

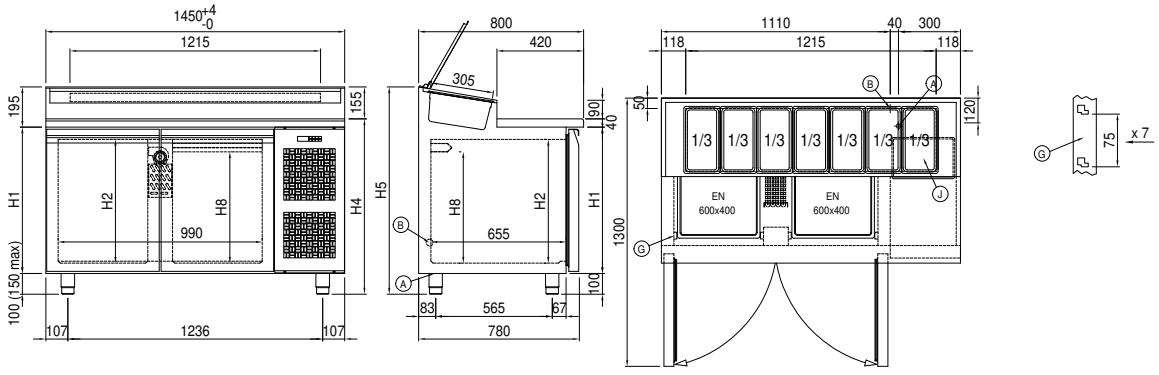


| | | | | | |
|---|---|---|---|---|---|
| **A:** | Power supply cable outlet | **B:** | Condensation water drain | **D:** | Airflow conveyor |
| **G:** | Racks pitch | **J:** | Automatic evaporation of condensing water | **R:** | Gas output pipes |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.