

Client \_\_\_\_\_ Quantity \_\_\_\_\_

Project \_\_\_\_\_ Position \_\_\_\_\_

## Pastry EN60x40 counter 4 doors

Model: TP21/1MJR-660

Cod: T20411000203



### Technical data

|                     |                                 |
|---------------------|---------------------------------|
| Top:                | With top                        |
| Gross capacity:     | 757 lt                          |
| Temperature range:  | -2°+8°C                         |
| Refrigerant unit:   | remote                          |
| Cooling gas:        | R452a                           |
| Defrost:            | Electric                        |
| Body height:        | 660 mm                          |
| Valve:              | Supplied standard with solenoid |
| Dimensions:         | 2350×800×800 mm                 |
| Packing dimensions: | 2655×900×998 mm                 |
| Gross weight:       | 178 Kg                          |
| Voltage:            | 220-240 V - 50-60 Hz            |
| Total rate:         | 810 W                           |
| Absorbed Current:   | 3,7 A                           |
| Cooling capacity:   | 668 W*                          |

### Features

|                              |  |
|------------------------------|--|
| Standard equipment:          | 16 slides EN60x40  |
| Control:                     | Electronic, display flush with the panel   |
| Doors:                       | 4 doors, self-closing, reversible with 105° stop                                   |
| Door gasket:                 | Magnetic, triple chamber and easily replaceable                                    |
| Insulation:                  | 60 mm thickness - CFC/HCFC free  |
| Exterior/interior finishing: | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel. |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene                             |
| Handle:                      | Stainless steel AISI 304, 2 mm thick   |
| Racks and slides:            | Stainless steel AISI 304   |
| Feets:                       | AISI 304 stainless steel adjustable h 100/150 mm                                   |
| Cosmo:                       | Predisposed for Cosmo Hub connection   |

## Accessories and variants

|  |  |
|--|--|
| Drawers 1/2  | Granite flat worktop                       |
| Drawers 1/3  | Granite worktop with splashback            |
| Drawers 1/3 + 2/3  | Remote condensing unit NEK6210GK           |
| Technical compartment on the left                        | Adjustable feet h 145/195 mm               |
| Common technical compartment                             | 6 Swivel and brake castors h 128 mm        |
| Counters without a technical compartment                 | Aluminium coated backingan EN60x40 h 20 mm |
| Lock with key for drawer 1/2                             | Stainless steel shelf EN60x40              |
| Lock with key for drawer 1/3                             | Plastic coated shelf EN60x40               |
| Lock with key for drawer 1/3 + 2/3                       | Pair of type L slides 605 mm               |
| RAL customisable colouring                               | R134a valve                                |
| Stainless steel evaporator                               | Serial interface, RS485 cable              |
| Predisposition for connection to CO2 remote control unit | Cosmo cable connection kit                 |
| Alimentazione frequenza 60Hz                             | Removable plinth EN 4DR h 50 mm            |
| Other special voltage                                    | Removable plinth EN 4DR h 100 mm           |
| Internal hygiene H3                                      | Removable plinth EN 4DR h 150 mm           |


## Remote unit technical data

|                            |                         |
|----------------------------|-------------------------|
| <b>Voltage:</b>            | 220-240 V - 50 Hz       |
| <b>Cooling gas:</b>        | R452A                   |
| <b>Gross weight:</b>       | 16 Kg                   |
| <b>Dimensions:</b>         | 480x330x295 mm          |
| <b>Packing dimensions:</b> | 540x345x310 mm          |
| <b>Cooling capacity:</b>   | Evap. -10°C Cond. +55°C |

## COSMO - wi-fi control

Cosmo è la tecnologia wi-fi che permette di connettere e monitorare da smartphone gli apparecchi Coldline. Collega i tavoli Pastry ad un Cosmo hub (MODI, VISION o LEVTRONIC) e dall'app potrai controllare le condizioni di funzionamento di ogni macchina e ricevere alert in caso di funzionamento anomalo.

## Technical draw

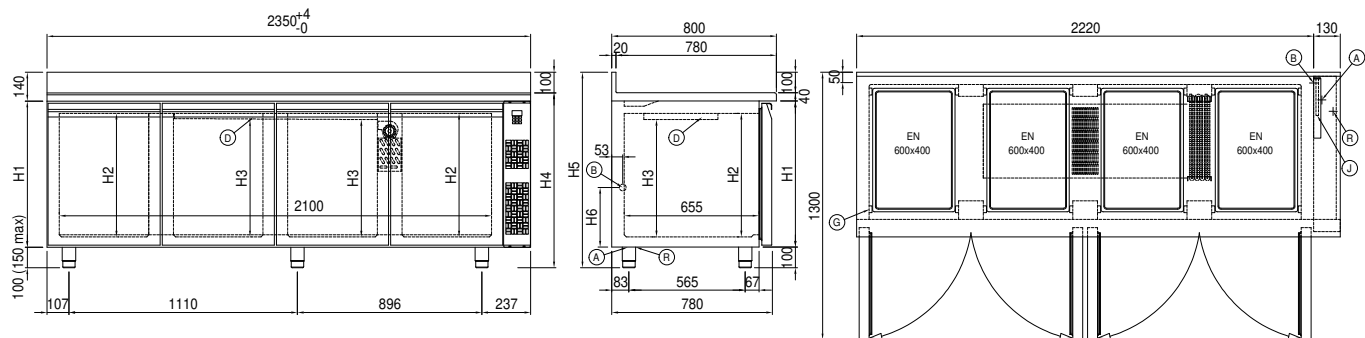

|           |                           |           |   |           |                  |
|-----------|---------------------------|-----------|---|-----------|------------------|
| <b>A:</b> | Power supply cable outlet | <b>B:</b> | Condensation water drain                  | <b>D:</b> | Airflow conveyor |
| <b>G:</b> | Racks pitch               | <b>J:</b> | Automatic evaporation of condensing water | <b>R:</b> | Gas output pipes |