

Client _____ Quantity _____

Project _____ Position _____

Display case for ingredients 1450 mm

Model: YP14/6NL

Cod: V42141000001



Technical data

Gross capacity:	51 lt
Temperature range:	+2°+10°C
Refrigerant unit:	Plug-in
Cooling gas:	R290 (GWP=3)
Refrigerant Charge:	75g
Valve:	Supplied standard with solenoid
Dimensions:	1450×380×275 mm
Packing dimensions:	1510×450×473 mm
Net / gross weight:	35 Kg / 45 Kg
Net / gross volume:	/ 51 lt
Voltage:	220-240 V - 50 Hz
Total rate:	250W - 1,15A
Cooling capacity:	406 W*
*:	Evap. -10°C Cond. +55°C

Features

Control:	Electronic, display flush with the panel
Insulation:	30 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Cosmo:	Predisposed for Cosmo Hub connection

Accessories and variants

Alimentazione frequenza 60Hz

Other special voltage

Lid for overnight storage of ingredients GN1/3
1028x302x20

1450 display case pans kit, GN1/3

Wall clamps, 2 pieces

Kit of 4 stainless steel feet

Cosmo cable connection kit

Cosmo wifi connection kit

Pan GN1/2 325x265x150 mm

Lid for GN1/2 pan

Pan GN1/3 325x176x150 mm

Lid for GN1/3 pan

Pan GN1/6 176x162x150 mm

Lid for GN1/6 pan

Pan GN1/9 176x108x100 mm

Lid for GN1/9 pan

Pan GN2/8 325x132x150 mm

Lid for GN2/8 pan


Brackets for pans 20 mm GN1/3

Brackets for pans 25 mm GN1/3

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The display case for ingredients, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

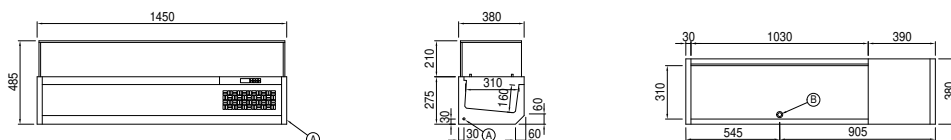

A: Power supply cable outlet

B: Condensation water drain