

| Client  | Quantity |
|---------|----------|
| Project | Position |

# Modi Up Blast Chiller

Model: W20UL-R452 Cod: W51203000001



# **Technical data**

| Max capacity:       | 21 basins 360x165x150 mm or 21 ice cream containers Ø 200x200x125 mm |
|---------------------|----------------------------------------------------------------------|
| Gross capacity:     | 872 lt                                                               |
| Temperature range:  | -40°+10°C                                                            |
| Ventilation range:  | 25% - 100%                                                           |
| Humidifier:         | Not available                                                        |
| Refrigerant unit:   | Plug-in                                                              |
| Yield +90/+3:       | 88 Kg                                                                |
| Yield +90/-18:      | 62 Kg                                                                |
| Climate class:      | 5                                                                    |
| Cooling gas:        | R452a (GWP=2.141)                                                    |
| Defrost:            | Forced air                                                           |
| Valve:              | Electronic expansion valve                                           |
| Dimensions:         | 810×1015×2210 mm                                                     |
| Packing dimensions: | 905×1130×2365 mm                                                     |
| Net / gross weight: | 220 Kg / 230 Kg                                                      |
| Net / gross volume: | / 872 lt                                                             |
| Voltage:            | 400-415 V - 50-60 Hz                                                 |
| Total rate:         | 6450 W - 12,45 A                                                     |
| Cooling capacity:   | 7751 W*                                                              |
| *:                  | Evap10°C Cond. +45°C                                                 |
|                     |                                                                      |

# **Features**

| Functions:                   | Blast chilling, shock freezing, continuous cycle                        |
|------------------------------|-------------------------------------------------------------------------|
| Standard equipment:          | 6 slides EN60x40, 6 plastic coated EN60x40 shelves                      |
| Control:                     | 4,3" touch screen display with USB port                                 |
| Doors:                       | Cushioned, with anti-odor system                                        |
| Door gasket:                 | Magnetic, triple chamber and easily replaceable                         |
| Core probe:                  | Needle probe with 1 reading point, quick-release and easily replaceable |
| Insulation:                  | 60 mm thickness - CFC/HCFC free                                         |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel.                         |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene                  |
| Handle:                      | Stainless steel AISI 304, 2 mm thick                                    |
| Racks and slides:            | Stainless steel AISI 304, quick release                                 |
| Feets:                       | AISI 304 stainless steel adjustable h 100/150 mm                        |
| Cosmo:                       | Wi-Fi remote control system                                             |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



## Accessories and variants

RAL customisable colouring

Sonda al cuore a 3 punti di lettura

Sonda al cuore riscaldata a 1 punto di lettura

Reverse door opening from standard

Alimentazione Monofase 50Hz oppure 60Hz

Alimentazione Trifase 50Hz oppure 60Hz

Alimentazione frequenza 60Hz

Other special voltage

Lowered foot h 55/70 mm

4 Swivel and brake castors h 128 mm

Aluminium coated backingan EN60x40 h 20 mm

Stainless steel shelf EN60x40


Plastic coated shelf EN60x40

Pair of type L slides 398 mm EN

### COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows MODI blast chillers to be connected, updated and monitored from smartphones. MODI is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

### **Technical draw**

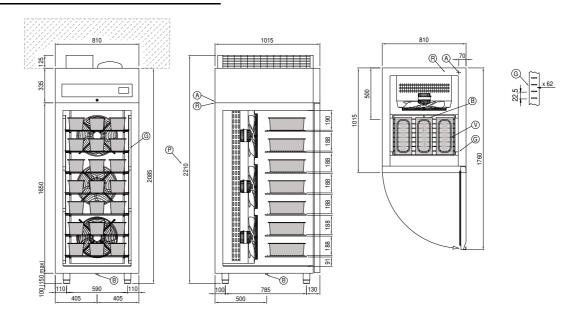

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

۷:

Q: Plug-In

R: Gas output pipes

Basins 360x165x120h (not included)

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.