

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## Vision F Blast Chiller

Model: W10FR

Cod: W64105000001



Vision multifunction blast chiller 10 trays F version, temperature range -40°+65°C with humidifier boiler as standard. It is equipped with the functions: blast chilling, blast freezing, manual cycle, thawing, proving, retarded proving, holding, desiccation, chocolate, yoghurt, steam sanitising. Remote cooling system with R452a refrigerant gas. Devote™ - Dynamic Evolution Temperature - the innovative system that autonomously recognises the weight, size and temperature of food and automatically shortens the blast chilling or freezing time of hot food without the use of a core probe. 7" touch screen on the door and operating mode with customisable recipes, by time, with core probe or with Devote algorithm. Adjustable ventilation 25-100%, adjustable humidity 45-95%. Blast chilling yield +90/+3°C - 50 Kg; blast freezing yield +90/-18°C - 45 Kg. 5 heavy duty climatic class, forced air defrost. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). Electronic expansion valve and anti-corrosion painted evaporator. Cushioned door with anti-odour system with Easily replaceable triple chamber magnetic gasket, core probe with screw connector, housing on the port and led lighting. Exterior and interior AISI 304 stainless steel, interior made of "canvas" steel with special highly durable texture. fan unit and condenser cover removably without tools. Equipment: 10 GN1/1-EN60x40 pairs of slides. ModBus/RTU Rs485 connection as standard. Cosmo: wi-fi connection for remote monitoring via Cosmo App. When wired to Coldline counters and cabinets acts as a hub for remote monitoring of connected equipment.

### Technical data

|                     |                                 |
|---------------------|---------------------------------|
| Top:                | 4 cm thickness                  |
| Max capacity:       | 20 trays GN1/1, EN60x40 h 20 mm |
| Gross capacity:     | 367 lt                          |
| Temperature range:  | -40°+65°C                       |
| Ventilation range:  | 25% - 100%                      |
| Humidity range:     | 45% - 95% with humidifier       |
| Humidifier:         | Including                       |
| Refrigerant unit:   | remote                          |
| Yield +90/+3:       | 50 Kg                           |
| Yield +90/-18:      | 45 Kg                           |
| Cooling gas:        | R452a (GWP=2.141)               |
| Defrost:            | Forced air                      |
| Valve:              | Electronic expansion valve      |
| Dimensions:         | 780x859x1563 mm                 |
| Packing dimensions: | 875x915x1826 mm                 |
| Net / gross weight: | 130 Kg / 140 Kg                 |
| Net / gross volume: | / 367 lt                        |
| Voltage:            | 400-415 V - 50-60 Hz            |
| Total rate:         | 1834 W - 8,0 A                  |
| Cooling capacity:   | 5440 W*                         |
| *:                  | Evap. -10°C Cond. +45°C         |

### Features

|                              |  |
|------------------------------|--|
| Functions:                   | Blast chilling, shock freezing, thawing, proving and retarder prover, holding, desiccation, chocolate, yoghurt, steam sanitizing, manual cycle |
| Standard equipment:          | 10 slides GN1/1, EN60x40   |
| Control:                     | 7" touch screen display with USB port  |
| Doors:                       | Cushioned, with anti-odor system   |
| Door gasket:                 | Magnetic, triple chamber and easily replaceable  |
| Core probe:                  | Needle probe with 1 reading point, quick-release and easily replaceable  |
| Insulation:                  | 60 mm thickness - CFC/HCFC free  |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. Internal and external in "linen canvas" steel  |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene   |
| Handle:                      | In AISI 304 stainless steel  |
| Racks and slides:            | Stainless steel AISI 304, quick release  |
| Feets:                       | AISI 304 stainless steel adjustable h 100/150 mm   |
| Cosmo:                       | Wi-Fi remote control system  |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.

### Accessories and variants

|   |   |
|---|---|
| RAL customisable colouring                      | Lowered foot h 55/70 mm                     |
| Sonda al cuore a 3 punti di lettura             | 4 Swivel and brake castors h 128 mm         |
| Sonda al cuore riscaldata a 1 punto di lettura  | Stainless steel shelf GN1/1                 |
| Reverse door opening from standard              | Plastic coated shelf GN1/1                  |
| Alimentazione Monofase 50Hz oppure 60Hz         | Stainless steel shelf EN60x40               |
| Alimentazione Trifase 50Hz oppure 60Hz          | Plastic coated shelf EN60x40                |
| Other special voltage                           | Pair of type L slides 398 mm GN-EN          |
| Remote condensing unit W10-W14T                 | Pair of type L slides 398 mm EN             |
| Silenced faired remote condensing unit W10-W14T | Sanitizing detergent                        |
| Purity C Quell ST 50 filter cartridge           | Touch screen kit for storage device control |


### Remote unit technical data

|                            |                         |
|----------------------------|-------------------------|
| Voltage:                   | 400-415 V - 50-60 Hz    |
| Assorbimento Unità Remota: | 3,26kW - 5,9A           |
| Cooling gas:               | R404-R452a              |
| Gross weight:              | 35 Kg                   |
| Dimensions:                | 780x752x430 mm          |
| Pipe delivery:             | 10 mm                   |
| Pipe suction:              | 16 mm                   |
| Cooling capacity:          | Evap. -10°C Cond. +45°C |

### COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows VISION blast chillers to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

### Technical draw

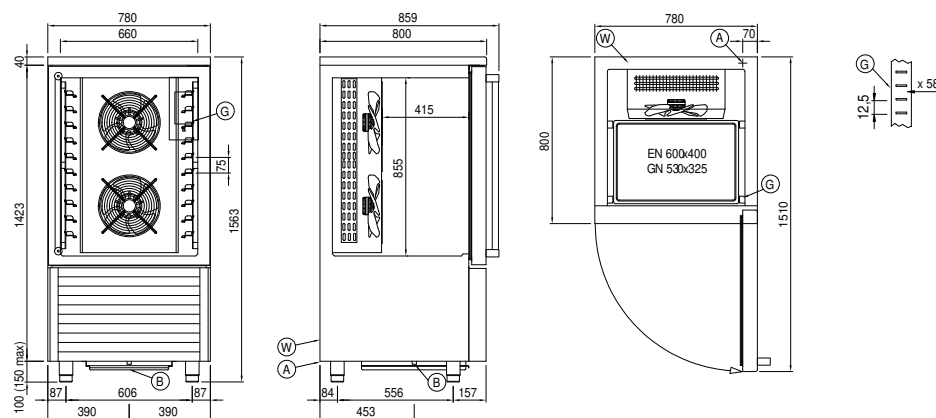

- A: Power supply cable outlet
- B: Condensation water drain
- G: Racks pitch
- W: Water mains connection for humidifier - 3/4" female. Unloading not required

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.