

| Client  | Quantity |
|---------|----------|
| Project | Position |

## Vision F Blast Chiller Counter

Model: WTA7FR Cod: W67075012001



temperature range -40°+65°C with humidifier boiler as standard. It is equipped with the functions: blast chilling, blast freezing, manual cycle, thawing, proving, retarded proving, holding, desiccation, chocolate, yoghurt, steam sanitising. Remote cooling system with R452a refrigerant gas. Devote  $^{\text{\tiny TM}}$  - Dynamic Evolution Temperature - the innovative system that autonomously recognises the weight, size and temperature of food and automatically shortens the blast chilling or freezing time of hot food without the use of a core probe. 7" touch screen and operating mode with customisable recipes, by time, with core probe or with Devote algorithm. Adjustable ventilation 25-100%, adjustable humidity 45-95%. Blast chilling yield +90/+3°C - 34 Kg; blast freezing yield +90/-18°C - 24 Kg. 5 heavy duty climatic class, forced air defrost. 60 mm insulation thickness -  $\mbox{\rm HFO}$ with high insulation performance and low environmental impact (CFC, HCFC, HFC free). Electronic expansion valve and anti-corrosion painted evaporator. Easily replaceable triple chamber magnetic gasket, core probe with screw connector and led lighting. Exterior and interior AISI 304 stainless steel. Equipment: 7 GN1/1-EN60x40 pairs of slides. ModBus/RTU Rs485 connection as standard. Cosmo: wi-fi connection for remote monitoring via Cosmo App. When wired to Coldline counters and cabinets acts as a hub for remote monitoring of connected equipment.

Vision counter multifunction blast chiller 7 trays F version top with splashback,

## **Technical data**

| Тор:                | Thickness 4 cm. Reinforced in order to place an oven |
|---------------------|--|
| Max capacity:       | 11 trays GN1/1, EN60x40 h 20 mm                      |
| Gross capacity:     | 248 lt   |
| Temperature range:  | -40°+65°C  |
| Ventilation range:  | 25% - 100%   |
| Humidity range:     | 45% - 95% with humidifier                            |
| Humidifier:         | Including  |
| Refrigerant unit:   | remote   |
| Yield +90/+3:       | 34 Kg  |
| Yield +90/-18:      | 24 Kg  |
| Cooling gas:        | R452a (GWP=2.141)                                    |
| Defrost:            | Forced air   |
| Body height:        | 710 mm   |
| Valve:              | Electronic expansion valve                           |
| Dimensions:         | 1400×700×950 mm                                      |
| Packing dimensions: | 1545×900×998 mm                                      |
| Net / gross weight: | 155 Kg / 165 Kg                                      |
| Net / gross volume: | / 248 lt   |
| Voltage:            | 220-240 V - 50-60 Hz                                 |
| Total rate:         | 1250 W - 6,04 A                                      |
| Cooling capacity:   | 2084 W*  |
| *:                  | Evap10°C Cond. +45°C                                 |

#### **Features**

| Functions:                   | Blast chilling, shock freezing, thawing, proving and retarder prover, holding, desiccation, chocolate, yoghurt, steam sanitizing, manual cycle |
|------------------------------|--|
| Standard equipment:          | 7 slides GN1/1, EN60x40  |
| Control:                     | 7" touch screen display with USB port  |
| Door gasket:                 | Magnetic, triple chamber and easily replaceable  |
| Core probe:                  | Needle probe with 1 reading point, quick-release and easily replaceable  |
| Insulation:                  | 60 mm thickness - CFC/HCFC free  |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel.<br>Internal and external in "linen canvas" steel   |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene   |
| Handle:                      | Stainless steel AISI 304, 2 mm thick   |
| Racks and slides:            | Stainless steel AISI 304, quick release  |
| Feets:                       | AISI 304 stainless steel adjustable h 100/150 mm   |
| Cosmo:                       | Wi-Fi remote control system  |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



#### Accessories and variants

| RAL customisable colouring                     |
|--|
| Sonda al cuore a 3 punti di lettura            |
| Sonda al cuore riscaldata a 1 punto di lettura |
| Reverse door opening from standard             |
| Alimentazione frequenza 60Hz                   |
| Other special voltage                          |
| Remote condensing unit W7T counter             |
| Purity C Quell ST 50 filter cartridge          |
| Lowered foot h 55/70 mm                        |

| 4 Swivel and brake castors h 128 mm         |
|---|
| Stainless steel shelf GN1/1                 |
| Plastic coated shelf GN1/1                  |
| Stainless steel shelf EN60x40               |
| Plastic coated shelf EN60x40                |
| Pair of type L slides 398 mm GN-EN          |
| Pair of type L slides 398 mm EN             |
| Sanitizing detergent                        |
| Touch screen kit for storage device control |
|   |


### Remote unit technical data

| Voltage:          | 220-240 V - 50 Hz    |
|-------------------|----------------------|
| Cooling gas:      | R404-R452a           |
| Gross weight:     | 25 Kg                |
| Dimensions:       | 650×650×400 mm       |
| Pipe delivery:    | 10 mm                |
| Pipe suction:     | 16 mm                |
| Cooling capacity: | Evap10°C Cond. +45°C |

# COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows VISION blast chillers to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

## **Technical draw**

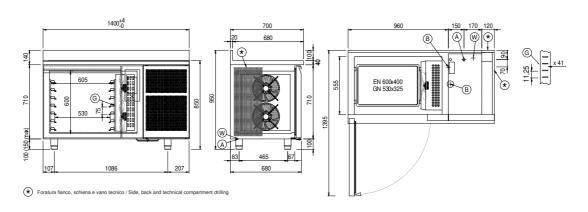

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

W: Water mains connection for humidifier - 3/4" female. Unloading not required

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.