

Client \_\_\_\_\_ Quantity \_\_\_\_\_

Project \_\_\_\_\_ Position \_\_\_\_\_

## Vision Industry W30K U

Model: W30KUR

Cod: W80111112001



### Technical data

Max capacity:	1 trolley
Temperature range:	-40°+10°C
Ventilation range:	25% - 100%
Humidifier:	Not available
Refrigerant unit:	remote
Yield +90/+3:	90 Kg
Yield +90/-18:	66 Kg
Cooling gas:	R404/R452
Defrost:	Forced air
Valve:	Electronic expansion valve
Dimensions:	960×1276×2385 mm
Packing dimensions:	1050×1300×2515 mm
Net / gross weight:	318 Kg / 330 Kg
Net / gross volume:	/
Voltage:	400-415 V - 50-60 Hz
Total rate:	410 W - 0,72 A
Cooling capacity:	11010 W*
*:	Evap. -10°C Cond. +45°C

### Features

Functions:	Blast chilling, shock freezing, continuous cycle
Control:	7" touch screen display with USB port
Doors:	Cushioned, with anti-odor system
Door gasket:	Magnetic, triple chamber and easily replaceable
Core probe:	Needle probe with 1 reading point, quick-release and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	AISI 304 stainless steel exterior and interior
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	In AISI 304 stainless steel
Racks and slides:	Stainless steel AISI 304, quick release
Cosmo:	Wi-Fi remote control system

## Accessories and variants

Reverse door opening from standard	Other special voltage
Door stop 100°	Open remote condensing unit W20T
Sonda al cuore 3 punti di lettura	Silenced faired remote condensing unit W20T
Sonda al cuore riscaldata 1 punto di lettura	Trolley GN1/1 20 trays 598x530x1630 mm
Winter kit -20°C	Trolley EN60x40 20 trays 460x620x1750 mm
Winter kit -40°C	Purity C Quell ST 50 filter cartridge
Predisposition for connection to CO2 remote control unit	Sterilizing UV lamp


## Remote unit technical data

Voltage:	400-415 V 3N - 50 Hz
Assorbimento Unità Remota:	3,7kW - 7,3A
Cooling gas:	R404-R452a
HP unit:	3
Gross weight:	187 Kg
Dimensions:	930×680×456 mm
Pipe delivery:	12 mm
Pipe suction:	28 mm
Cooling capacity:	Evap. -10°C Cond. +45°C

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows VISION blast chillers to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

## Technical draw

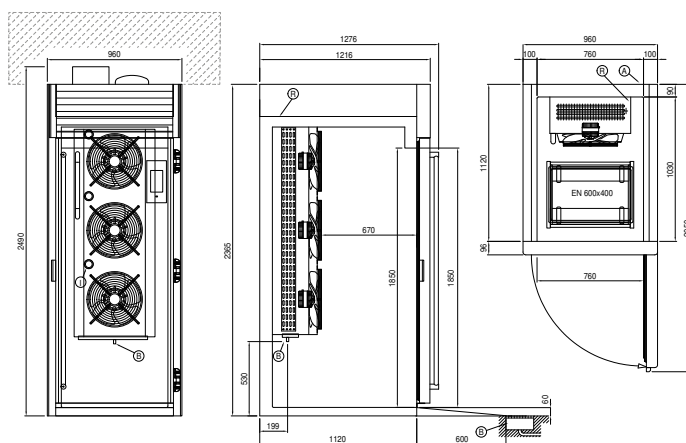

A: Power supply cable outlet

B: Condensation water drain

I: Internal led lighting

R: Gas output pipes