

Client \_\_\_\_\_ Quantity \_\_\_\_\_

Project \_\_\_\_\_ Position \_\_\_\_\_

## Display case for ingredients 1795 mm

Model: VP18/8NR

Cod: V41181110001

Display case for ingredients with glass, width 1795 mm for GN1/4 trays (excluded). Range of temperature 0°+10°C with remote refrigeration unit and R452a refrigerant gas. Exterior and interior AISI 304 stainless steel, water condensation drain, 30 mm insulation thickness HFO with high insulation performance and low environmental impact (CFC-, HCFC-, HFC-free). Ready for connection to Cosmo remote supervision system and ModBus/RTU Rs485 connection. Allows installation on the granite splashback of pizza counters, on stainless steel feet or fixed to the wall (optional).



### Technical data

|                     |                                 |
|---------------------|---------------------------------|
| Gross capacity:     | 55 lt                           |
| Temperature range:  | +2°+10°C                        |
| Refrigerant unit:   | remote                          |
| Cooling gas:        | R452a (GWP=2.141)               |
| Valve:              | Supplied standard with solenoid |
| Dimensions:         | 1795×322×485 mm                 |
| Packing dimensions: | 1855×390×473 mm                 |
| Net / gross weight: | 45 Kg / 55 Kg                   |
| Net / gross volume: | / 55 lt                         |
| Voltage:            | 220-240 V - 50-60 Hz            |
| Total rate:         | 22W - 0,1A                      |
| Cooling capacity:   | 368 W*                          |
| *:                  | Evap. -10°C Cond. +55°C         |

### Features

|                              |  |
|------------------------------|--|
| Control:                     | Electronic, display flush with the panel               |
| Insulation:                  | 30 mm thickness - CFC/HCFC free                        |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel.        |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene |
| Cosmo:                       | Predisposed for Cosmo Hub connection                   |

## Accessories and variants

|                                   |                               |
|-----------------------------------|-------------------------------|
| Alimentazione frequenza 60Hz      | Pan GN1/2 325x265x150 mm      |
| Other special voltage             | Lid for GN1/2 pan             |
| Remote condensing unit EMT6144GK  | Pan GN1/4 265x162x150 mm      |
| 1795 display case pans kit, GN1/4 | Lid for GN1/4 pan             |
| Wall clamps, 2 pieces             | Pan GN1/6 176x162x150 mm      |
| Kit of 4 stainless steel feet     | Lid for GN1/6 pan             |
| Cosmo cable connection kit        | Pan GN1/9 176x108x100 mm      |
| Cosmo wifi connection kit         | Lid for GN1/9 pan             |
| Pan GN1/1 325x530x150 mm          | Brackets for pans 20 mm GN1/4 |
| Lid for GN1/1 pan                 | Brackets for pans 25 mm GN1/4 |


## Remote unit technical data

|                            |                         |
|----------------------------|-------------------------|
| <b>Voltage:</b>            | 220-240 V - 50 Hz       |
| <b>Unit total rate :</b>   | 250W - 1,1A             |
| <b>Cooling gas:</b>        | R404-R452               |
| <b>Gross weight:</b>       | 17 Kg                   |
| <b>Dimensions:</b>         | 450x300x270 mm          |
| <b>Pipe delivery:</b>      | Ø 1/4"                  |
| <b>Pipe suction:</b>       | Ø 3/8"                  |
| <b>Packing dimensions:</b> | 470x330x300 mm          |
| <b>Cooling capacity:</b>   | Evap. -10°C Cond. +55°C |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The display case for ingredients, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

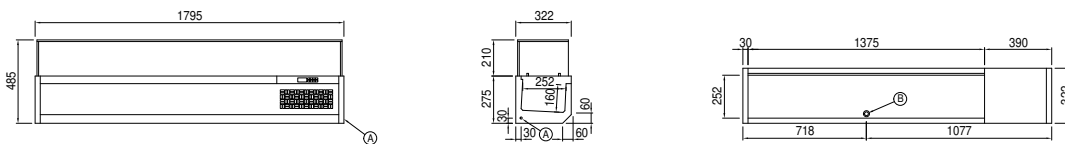

A: Power supply cable outlet

B: Condensation water drain