


Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## Display case for ingredients 2005 mm

Model: VP20/9NR

Cod: V41201110001

Display case for ingredients with glass, width 2005 mm for GN1/4 trays (excluded). Range of temperature 0°+10°C with remote refrigeration unit and R452a refrigerant gas. Exterior and interior AISI 304 stainless steel, water condensation drain, 30 mm insulation thickness HFO with high insulation performance and low environmental impact (CFC-, HCFC-, HFC-free). Ready for connection to Cosmo remote supervision system and ModBus/RTU Rs485 connection. Allows installation on the granite splashback of pizza counters, on stainless steel feet or fixed to the wall (optional).



### Technical data

Gross capacity:	63 lt
Temperature range:	+2°+10°C
Refrigerant unit:	remote
Cooling gas:	R452a (GWP=2.141)
Valve:	Supplied standard with solenoid
Dimensions:	2005×322×485 mm
Packing dimensions:	2065×390×473 mm
Net / gross weight:	50 Kg / 60 Kg
Net / gross volume:	/ 63 lt
Voltage:	220-240 V - 50-60 Hz
Total rate:	22W - 0,1A
Cooling capacity:	368 W*
*:	Evap. -10°C Cond. +55°C

### Features

Control:	Electronic, display flush with the panel
Insulation:	30 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Cosmo:	Predisposed for Cosmo Hub connection

## Accessories and variants

Alimentazione frequenza 60Hz	Pan GN1/2 325x265x150 mm
Other special voltage	Lid for GN1/2 pan
Remote condensing unit EMT6144GK	Pan GN1/4 265x162x150 mm
2005 display case pans kit, GN1/4	Lid for GN1/4 pan
Wall clamps, 2 pieces	Pan GN1/6 176x162x150 mm
Kit of 4 stainless steel feet	Lid for GN1/6 pan
Cosmo cable connection kit	Pan GN1/9 176x108x100 mm
Cosmo wifi connection kit	Lid for GN1/9 pan
Pan GN1/1 325x530x150 mm	Brackets for pans 20 mm GN1/4
Lid for GN1/1 pan	Brackets for pans 25 mm GN1/4


## Remote unit technical data

<b>Voltage:</b>	220-240 V - 50 Hz
<b>Assorbimento Unità Remota:</b>	250W - 1,1A
<b>Cooling gas:</b>	R404-R452
<b>Gross weight:</b>	17 Kg
<b>Dimensions:</b>	450×300×270 mm
<b>Pipe delivery:</b>	Ø 1/4"
<b>Pipe suction:</b>	Ø 3/8"
<b>Packing dimensions:</b>	470×330×300 mm
<b>Cooling capacity:</b>	Evap. -10°C Cond. +55°C

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The display case for ingredients, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

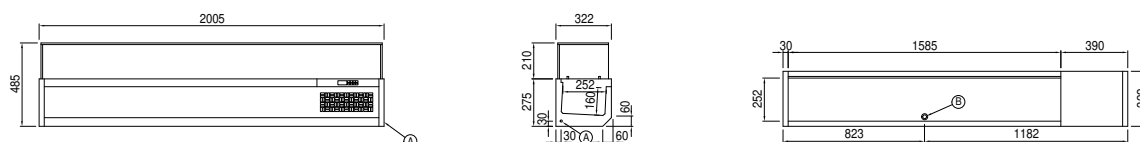

A: Power supply cable outlet

**B:**        Condensation water drain