

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## Display case for ingredients 2350 mm

Model: YP23/12NLR

Cod: V42231100001

Display case for ingredients without glass, width 2350 mm for GN1/3 trays (excluded). Range of temperature 0°+10°C with remote refrigeration unit and R452a refrigerant gas. Exterior and interior AISI 304 stainless steel, water condensation drain, 30 mm insulation thickness HFO with high insulation performance and low environmental impact (CFC-, HCFC-, HFC-free). Ready for connection to Cosmo remote supervision system and ModBus/RTU Rs485 connection. Allows installation on the granite splashback of pizza counters, on stainless steel feet or fixed to the wall (optional).



### Technical data

Gross capacity:	96 lt
Temperature range:	+2°+10°C
Refrigerant unit:	remote
Cooling gas:	R452a (GWP=2.141)
Valve:	Supplied standard with solenoid
Dimensions:	2350×380×275 mm
Packing dimensions:	2620×450×473 mm
Net / gross weight:	45 Kg / 55 Kg
Net / gross volume:	/ 96 lt
Voltage:	220-240 V - 50-60 Hz
Total rate:	22W - 0,1A
Cooling capacity:	368 W*
*:	Evap. -10°C Cond. +55°C

### Features

Control:	Electronic, display flush with the panel
Insulation:	30 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Cosmo:	Predisposed for Cosmo Hub connection

## Accessories and variants

Alimentazione frequenza 60Hz	Pan GN1/3 325x176x150 mm
Other special voltage	Lid for GN1/3 pan
Remote condensing unit EMT6144GK	Pan GN1/6 176x162x150 mm
Lid for overnight storage of ingredients GN1/3 1928x302x20	Lid for GN1/6 pan
2350 display case pans kit, GN1/3	Pan GN1/9 176x108x100 mm
Wall clamps, 2 pieces	Lid for GN1/9 pan
Kit of 4 stainless steel feet	Pan GN2/8 325x132x150 mm
Cosmo cable connection kit	Lid for GN2/8 pan
Cosmo wifi connection kit	Brackets for pans 20 mm GN1/3
Pan GN1/2 325x265x150 mm	Brackets for pans 25 mm GN1/3
Lid for GN1/2 pan	Brackets for pans 30 mm GN1/3


## Remote unit technical data

<b>Voltage:</b>	220-240 V - 50 Hz
<b>Unit total rate :</b>	250W - 1,1A
<b>Cooling gas:</b>	R404-R452
<b>Gross weight:</b>	17 Kg
<b>Dimensions:</b>	450x300x270 mm
<b>Pipe delivery:</b>	Ø 1/4"
<b>Pipe suction:</b>	Ø 3/8"
<b>Packing dimensions:</b>	470x330x300 mm
<b>Cooling capacity:</b>	Evap. -10°C Cond. +55°C

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The display case for ingredients, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

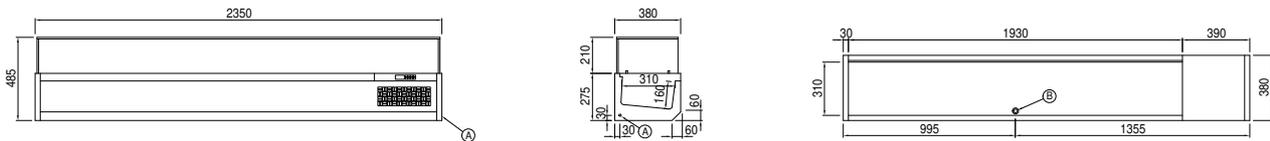

A: Power supply cable outlet

B: Condensation water drain