

Client _____ Quantity _____
 Project _____ Position _____

Pastry EN60x40 counter 2 doors

Model: TA13/1BJR-660

Cod: T20212000403

Pastry refrigerated counter 2 doors, counter body height 660 mm, top with splashback. Remote refrigeration unit, 5 heavy duty climatic class and R452a refrigerant gas. Temperature range -15°-22°C with ventilated refrigeration. Equipment: 8 pairs of slides for EN60x40 shelves. Each compartment can be configured with 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3 drawers. Anti-corrosion treated evaporator and electric defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.



Technical data

| | |
|---------------------|---------------------------------|
| Top: | With top and splashback |
| Gross capacity: | 357 lt |
| Temperature range: | -15°-22°C |
| Refrigerant unit: | remote |
| Cooling gas: | R452a (GWP=2.141) |
| Defrost: | Electric |
| Body height: | 660 mm |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 1240×800×900 mm |
| Packing dimensions: | 1545×900×998 mm |
| Net / gross weight: | 104 Kg / 114 Kg |
| Net / gross volume: | 230 lt / 357 lt |
| Voltage: | 220-240 V - 50-60 Hz |
| Total rate: | 920W - 4,2A |
| Cooling capacity: | 540 W* |
| *: | Evap. -30°C Cond. +55°C |

Features

| | |
|------------------------------|--|
| Standard equipment: | 8 slides EN60x40 |
| Control: | Electronic, display flush with the panel |
| Doors: | 2 doors, self-closing, reversible with 105° stop |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 60 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Predisposed for Cosmo Hub connection |

Accessories and variants

| | |
|--|--|
| Drawers 1/2 | Granite flat worktop |
| Drawers 1/3 | Granite worktop with splashback |
| Drawers 1/3 + 2/3 | Remote condensing unit NT2178GK |
| Technical compartment on the left | Adjustable feet h 145/195 mm |
| Common technical compartment | 4 Swivel and brake castors h 128 mm |
| Counters without a technical compartment | Aluminium coated backingan EN60x40 h 20 mm |
| Lock with key for drawer 1/2 | Stainless steel shelf EN60x40 |
| Lock with key for drawer 1/3 | Plastic coated shelf EN60x40 |
| Lock with key for drawer 1/3 + 2/3 | Pair of type L slides 605 mm |
| RAL customisable colouring | Serial interface, RS485 cable |
| Predisposition for connection to CO2 remote control unit | Cosmo cable connection kit |
| Alimentazione frequenza 60Hz | Cosmo wifi connection kit |
| Other special voltage | Removable plinth EN 2DR h 100 mm |
| Internal hygiene H3 | Removable plinth EN 2DR h 150 mm |


Remote unit technical data

| | |
|----------------------------|-------------------------|
| Voltage: | 220-240 V - 50 Hz |
| Unit total rate : | 650W - 3,0A |
| Cooling gas: | R452A |
| Gross weight: | 25,7 Kg |
| Dimensions: | 500x330x295 mm |
| Pipe delivery: | Ø 3/8" |
| Pipe suction: | Ø 3/8" |
| Packing dimensions: | 540x345x310 mm |
| Cooling capacity: | Evap. -30°C Cond. +55°C |

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

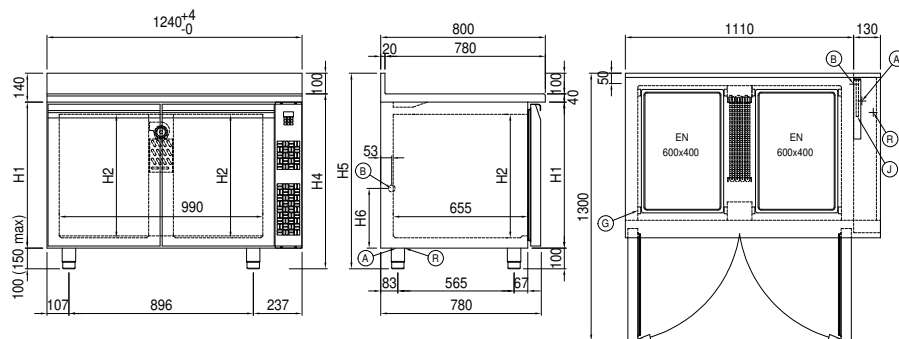

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

J: Automatic evaporation of condensing water

R: Gas output pipes