

Client _____ Quantity _____
Project _____ Position _____

Pizza Base EN60x40 counter 4 doors

Model: TZS21/1MR-760

Cod: T40410000202

Pizza refrigerated base 4 doors, counter body height 760 mm, without top. Remote refrigeration unit, 5 heavy duty climatic class and R452a refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Equipment: 16 pairs of slides for EN60x40 trays. Each compartment can be configured with refrigerated and neutral drawers. Anti-corrosion treated evaporator and electric defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.



Technical data

| | |
|---------------------|---------------------------------|
| Top: | Without top |
| Gross capacity: | 894 lt |
| Temperature range: | -2°+8°C |
| Refrigerant unit: | remote |
| Cooling gas: | R452a (GWP=2.141) |
| Defrost: | Electric |
| Body height: | 760 mm |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 2350×780×860 mm |
| Packing dimensions: | 2655×900×998 mm |
| Net / gross weight: | 162 Kg / 172 Kg |
| Net / gross volume: | 557 lt / 894 lt |
| Voltage: | 220-240 V - 50-60 Hz |
| Total rate: | 810W - 3,7A |
| Cooling capacity: | 668 W* |
| *: | Evap. -10°C Cond. +55°C |

Features

| | |
|------------------------------|--|
| Standard equipment: | 16 slides EN60x40 |
| Control: | Electronic, display flush with the panel |
| Doors: | 4 doors, self-closing, reversible with 105° stop |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 60 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Predisposed for Cosmo Hub connection |

Accessories and variants

| | |
|--|---|
| Drawers 1/2 | 1+1 Neutral drawers h 760 mm |
| Drawers 1/3 | Granite top 2350 mm |
| Drawers 1/3 + 2/3 | Adjustable feet h 145/195 mm |
| Lock with key for drawer 1/2 | 6 Swivel and brake castors h 128 mm |
| Lock with key for drawer 1/3 | Frame fitted with telescopic EN60x40 slides |
| Lock with key for drawer 1/3 + 2/3 | EN60x40 Pizza container h 60 mm |
| Predisposition for connection to CO2 remote control unit | Aluminium coated backingan EN60x40 h 20 mm |
| Alimentazione frequenza 60Hz | Pair of type L slides 605 mm |
| Other special voltage | Serial interface, RS485 cable |
| Remote condensing unit NEK6210GK | Cosmo cable connection kit |
| 7 Neutral drawers h 760 mm | Cosmo wifi connection kit |
| 3+1 Neutral drawers h 760 mm | Removable plinth EN 4DR h 100 mm |


Remote unit technical data

| | |
|----------------------------|-------------------------|
| Voltage: | 220-240 V - 50 Hz |
| Assorbimento Unità Remota: | 500W - 2,3A |
| Cooling gas: | R452A |
| Gross weight: | 16 Kg |
| Dimensions: | 480x330x295 mm |
| Pipe delivery: | Ø 1/4" |
| Pipe suction: | Ø 3/8" |
| Packing dimensions: | 540x345x310 mm |
| Cooling capacity: | Evap. -10°C Cond. +55°C |

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

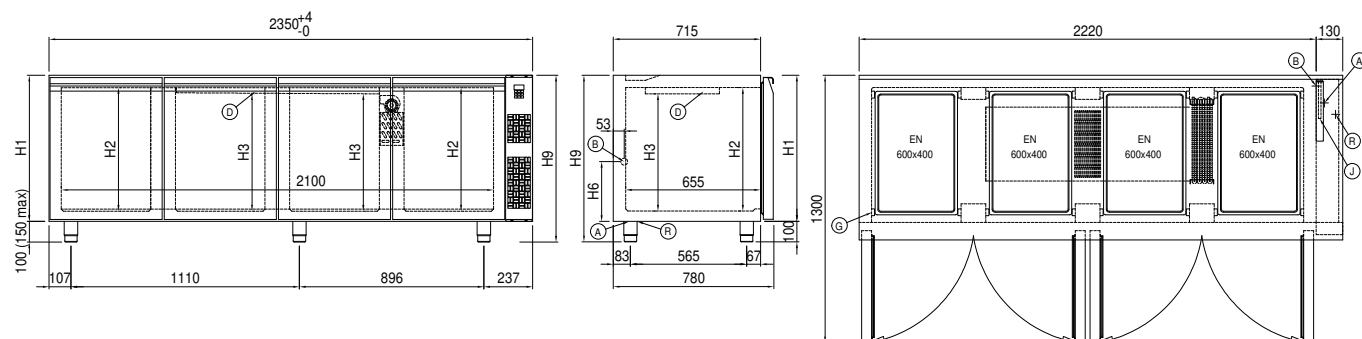

| | | | | | |
|----|---------------------------|----|---|----|------------------|
| A: | Power supply cable outlet | B: | Condensation water drain | D: | Airflow conveyor |
| G: | Racks pitch | J: | Automatic evaporation of condensing water | R: | Gas output pipes |