

Client _____ Quantity _____

Project _____ Position _____

Display case for ingredients 1600 mm

Model: YP16/7N

Cod: V41161000001



Technical data

Gross capacity:	47 lt
Temperature range:	+2°+10°C
Refrigerant unit:	Plug-in
Cooling gas:	R290 (GWP=3)
Refrigerant Charge:	75g
Valve:	Supplied standard with solenoid
Dimensions:	1600×322×275 mm
Packing dimensions:	1855×390×473 mm
Net / gross weight:	35 Kg / 45 Kg
Net / gross volume:	/ 47 lt
Voltage:	220-240 V - 50 Hz
Total rate:	250W - 1,15A
Cooling capacity:	406 W*
*:	Evap. -10°C Cond. +55°C

Features

Control:	Electronic, display flush with the panel
Insulation:	30 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Cosmo:	Predisposed for Cosmo Hub connection


Accessories and variants

Alimentazione frequenza 60Hz	Pan GN1/2 325x265x150 mm
Other special voltage	Lid for GN1/2 pan
Lid for overnight storage of ingredients GN1/4 1178x302x20	Pan GN1/4 265x162x150 mm
1600 display case pans kit, GN1/4	Lid for GN1/4 pan
Wall clamps, 2 pieces	Pan GN1/6 176x162x150 mm
Kit of 4 stainless steel feet	Lid for GN1/6 pan
Cosmo cable connection kit	Pan GN1/9 176x108x100 mm
Cosmo wifi connection kit	Lid for GN1/9 pan
Pan GN1/1 325x530x150 mm	Brackets for pans 20 mm GN1/4
Lid for GN1/1 pan	Brackets for pans 25 mm GN1/4

COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The display case for ingredients, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

Technical draw

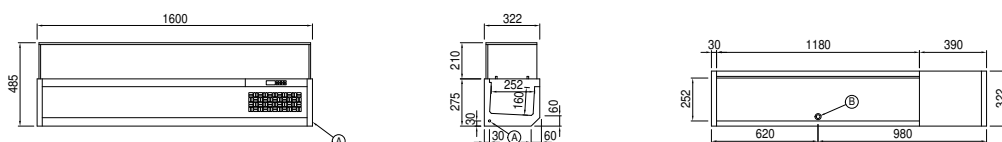

A: Power supply cable outlet

B: Condensation water drain